

ON-X Back-Lit Panel (12x6)

Modular & Recessed Range

CODE: OX-BL-60-12X6TC

QVIS[®]
LED LIGHTING



Tri
Colour



60W
Power

5YR
Warranty




OPAL
Diffuser

6300
Lumens

*

TECHNICAL DRAWINGS

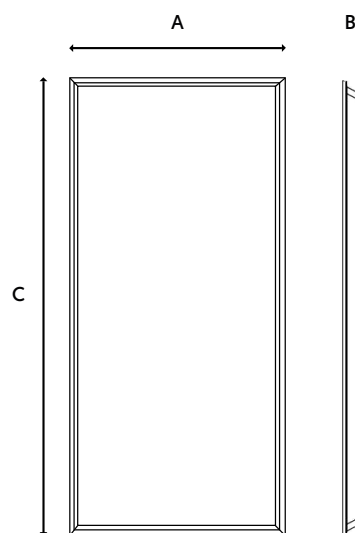


A = 595mm C = 1195mm
B = 32mm

Specification	On-X
System Power	60W
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>80
Typical UGR	<22
Lumen Output	6300Lm
LED Efficacy	105 Lm/cW
Power Factor	>0.95
IP Rating	IP44
Fire Rating	TP[b]
Diffuser	Opal
Dimmable	On Request
Beam Spread	120°
Colour Temperature	3000K / 4000K / 6000K
Housing Material	Aluminium
Operating Temperature	-20 to +45 °C
Input Voltage	AC200-240V, 50-60Hz
Dimensions	1195mm x 595mm x 32mm
Weight	4kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

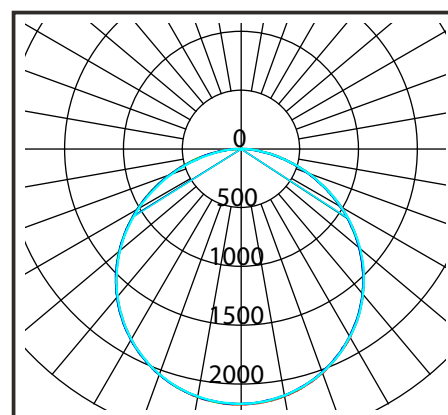

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com