

Helios Slimline Downlight (180mm)

Downlight Range

CODE: H65-15-180WW/MPS/QD

QVIS®
LED LIGHTING



15W
Power

7YR
Warranty



MPS
Diffuser

1575
Lumens




Switch Dim Corridor


Specification	Helios
System Power	15W
Driver Manufacturer	Q-Drive
LED Chipset	Samsung
Colour Rendering Index	>85
Typical UGR	<17
Lumen Output	1575Lm
LED Efficacy	105 Lm/cW
Power Factor	0.9
IP Rating	IP65
Fire Rating	TP(a)
Diffuser	Microprism
Dimmable	DALI / Switch-Dim / 1-10V
Beam Spread	90°
Colour Temperature	3000K
Housing Material	High Grade 6063 Aluminium Frame
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +65 °C
Input Voltage	AC200-240V, 50-60Hz
Cut Out Diameter	160mm
Dimensions	180mm x 27mm
Weight	0.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

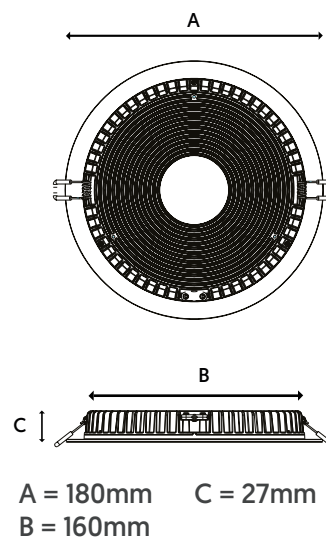

LUMINOUS INTENSITY DISTRIBUTION

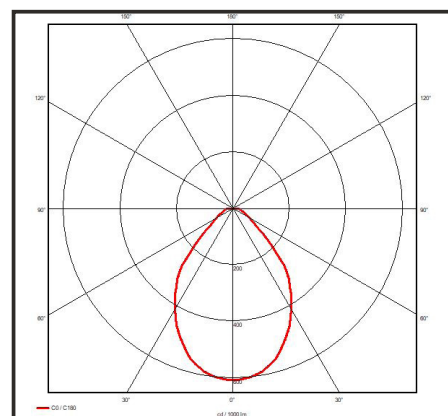

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com