

# Lynx Modular Panel (12x6)

Modular & Recessed Range

CODE: LYNX-ADV-45-12X6CW/QE

**QVIS**<sup>®</sup>  
LED LIGHTING



**3HR**  
Emergency  
3W Battery



**45W**  
Power

**7YR**  
Warranty




**OPAL**  
Diffuser

**6050**  
Lumens




## TECHNICAL DRAWINGS

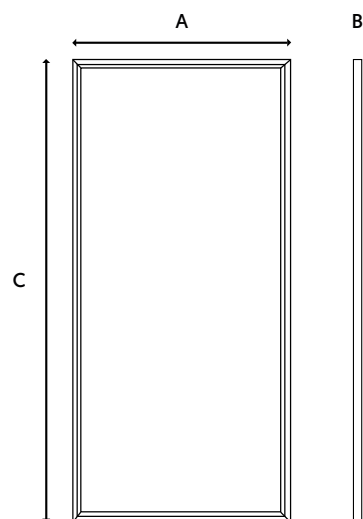

A = 595mm    C = 1195mm  
B = 10.5mm

## LUMINOUS INTENSITY DISTRIBUTION

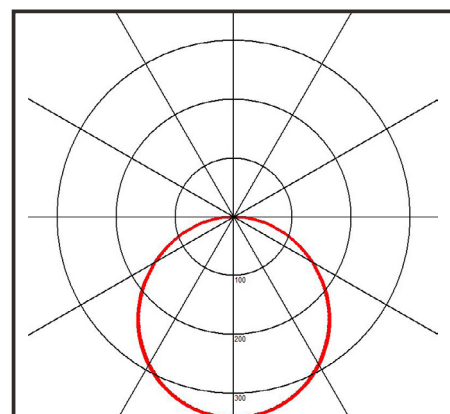

Specification	Lynx
System Power	45W [Emergency 3W]
Driver Manufacturer	Q-Drive
LED Chipset	Samsung
Colour Rendering Index	>85
Typical UGR	<19
Lumen Output	6075Lm [Emergency 405Lm]
LED Efficacy	135 Lm/cW
Power Factor	0.95
IP Rating	IP44 from Below
Diffuser	Opal
Dimmable	DALI / Switch-Dim / 1-10V
Beam Spread	160°
Colour Temperature	6000K
Housing Material	High Grade 6063 Aluminium Frame
Light Guide Plate	PMMA
Operating Temperature	-20 to +65 °C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	1195mm x 595mm x 10.5mm
Weight	8.25kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)