


Lynx Modular Panel (12x6)

Modular & Recessed Range

CODE: LYNX-SLG-40-12X6CW

QVIS[®]
LED LIGHTING

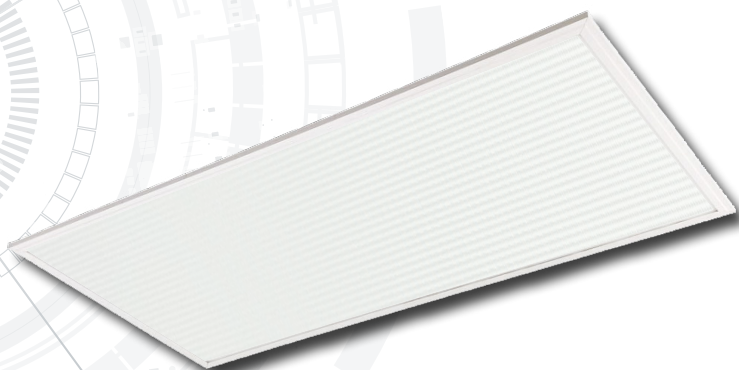

40W
Power


7YR
Warranty



MPS
Diffuser

4800
Lumens

TECHNICAL DRAWINGS

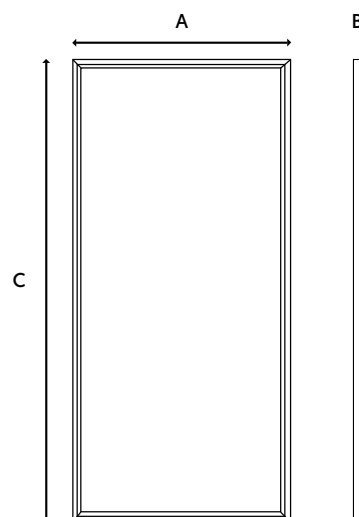


A = 595mm C = 1195mm
B = 10.5mm

Specification	Lynx
System Power	40W
Driver Manufacturer	Osram
LED Chipset	Samsung
Colour Rendering Index	>85
Typical UGR	<17
Lumen Output	4800Lm
LED Efficacy	120 Lm/cW
Power Factor	0.95
IP Rating	IP44 from Below
Diffuser	Microprism
Dimmable	On Request
Beam Spread	160°
Colour Temperature	6000K
Housing Material	High Grade 6063 Aluminium Frame
Light Guide Plate	PMMA
Operating Temperature	-20 to +45 °C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	1195mm x 595mm x 10.5mm
Weight	8.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

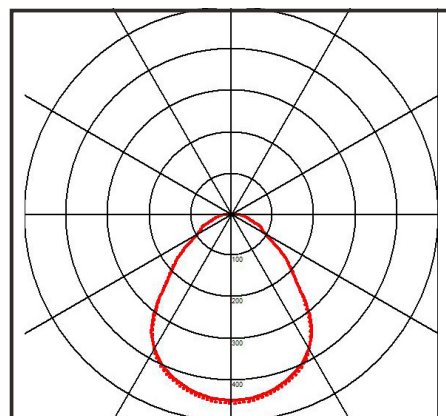

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com