


# Lynx Modular Panel (6x6)

Modular & Recessed Range

CODE: LYNX-SLG-25-6X6WW/EM

**QVIS**<sup>®</sup>  
LED LIGHTING

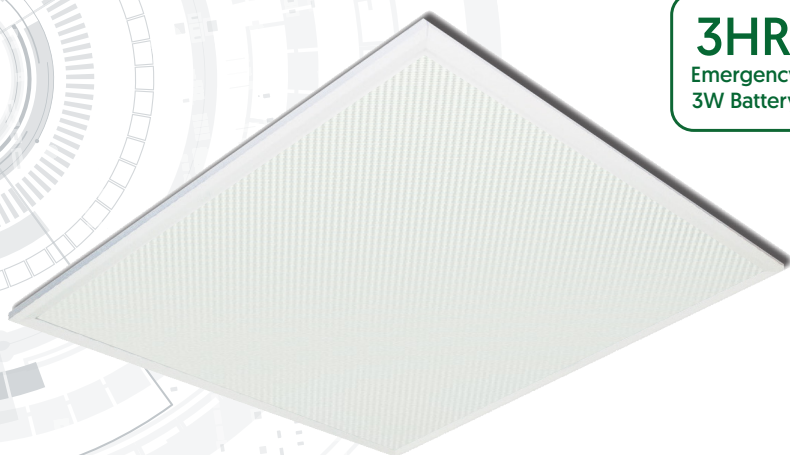

**3HR**  
Emergency  
3W Battery

**IP44**

**25W**  
Power

**7YR**  
Warranty


**TP(a)**

**MPS**  
Diffuser

**3000**  
Lumens


Specification	Lynx
System Power	25W [Emergency 3W]
Driver Manufacturer	Osram
LED Chipset	Samsung
Colour Rendering Index	>85
Typical UGR	<17
Lumen Output	3000Lm
LED Efficacy	120 Lm/cW [Emergency 360Lm]
Power Factor	0.95
IP Rating	IP44 from Below
Diffuser	Microprism
Dimmable	On Request
Beam Spread	160°
Colour Temperature	3000K
Housing Material	High Grade 6063 Aluminium Frame
Light Guide Plate	PMMA
Operating Temperature	-20 to +65 °C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	595mm x 595mm x 10.5mm
Weight	2.6kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

## TECHNICAL DRAWINGS

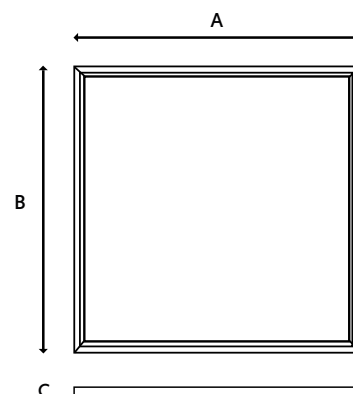

A = 595mm    C = 10.5mm  
B = 595mm

## LUMINOUS INTENSITY DISTRIBUTION

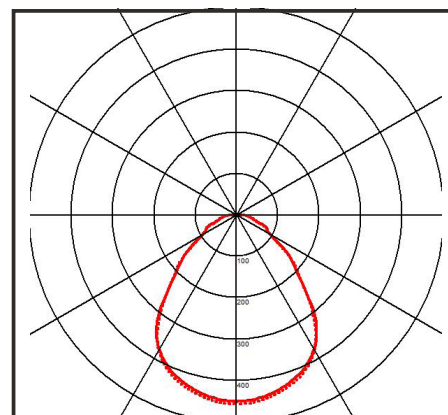

\* Warranty terms and conditions apply

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)