


LYNX RECESSED MODULAR (12x6)

LYNX-SLG-40-12X6NW/E

QVIS®

LIGHTING & SECURITY



OSRAM

Driver as Standard

SAMSUNG


LED's inside

| Specification | Lynx SLG 12x6 |
|------------------------|--|
| System Power | 40W (Emergency 3W) |
| Driver Manufacturer | Osram |
| LED Chipset | Samsung |
| Diffuser | Microprism |
| Colour Rendering Index | >85 |
| Typical UGR | <17 |
| LED Efficacy | 120 Lm/cW |
| Lumen Output | 4800Lm (Emergency 360Lm) |
| Fire Rating | TP(a) |
| Dimmable | On request |
| Power Factor | 0.95 |
| IP Rating | IP44 |
| Beam Spread | 160 ° |
| Colour Type | Single |
| Colour Temperature | 4000K |
| Housing Material | High Grade 6063 Aluminium |
| Light Guide Plate | PMMA |
| Operating Temperature | -20 to 50 °C |
| Input Voltage | AC 200-240V, 47-63Hz |
| Weight | 8.5kg |
| Dimensions | 1195mm x 595mm x 10.5mm |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| Emergency Output | 3 Hours (3W)* |
| CE Standards | EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |


* Warranty terms and conditions apply

*For emergency products with a rated service life of < 50,000 operating hours, QVIS offers a 5-year warranty period on the luminaire and 1-year warranty period on the battery pack

TECHNICAL DRAWINGS

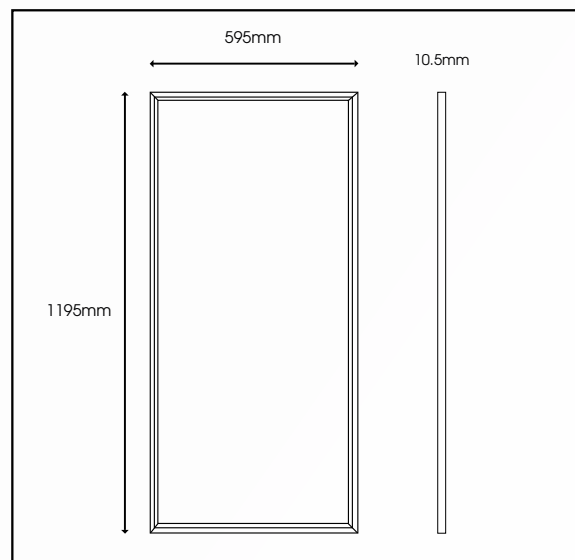

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

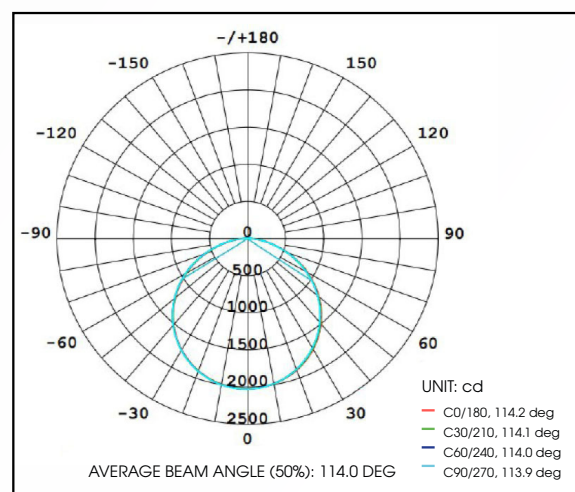

For further information on our products or terms and conditions visit our website
www.qvisled.com or email: sales@qvislighting.com

MODULAR & RECESSED RANGE