



LYNX RECESSED MODULAR (12x6)

LYNX-SLG40-12X6NW/TD

QVIS[®]

LIGHTING & SECURITY




TRIDONIC
enlightening your ideas

Driver Manufacturer


SAMSUNG

LED's inside

TECHNICAL DRAWINGS

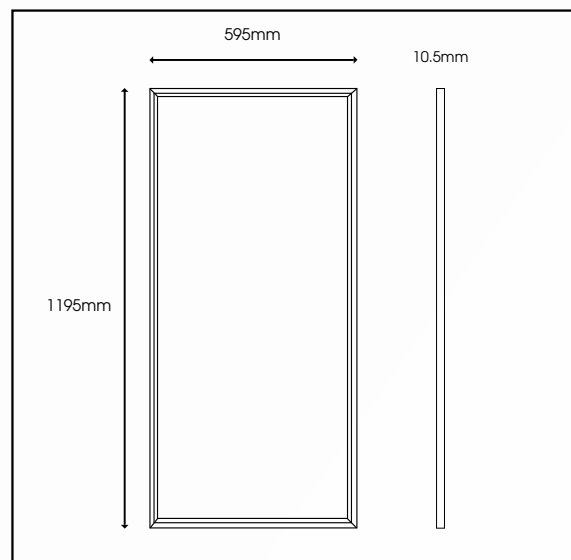

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

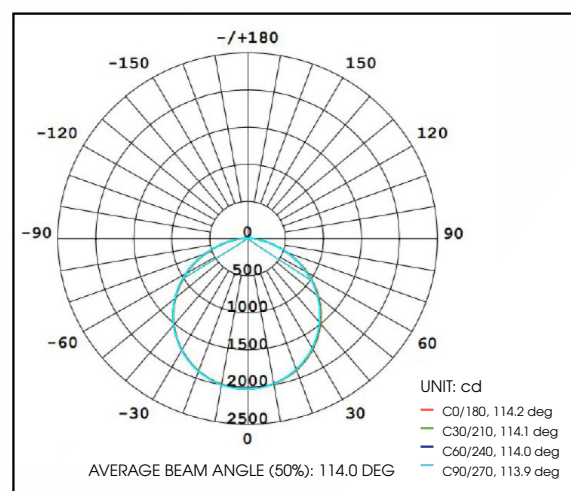

Specification	Lynx SLG 12x6
System Power	40W
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Diffuser	Microprism
Colour Rendering Index	>85
Typical UGR	<17
LED Efficacy	120 Lm/cW
Lumen Output	4800Lm
Fire Rating	TP(a)
Dimmable	Dall / Switch-Dim / Corridor / DSI
Power Factor	0.95
IP Rating	IP44
Beam Spread	160 °
Colour Type	Single
Colour Temperature	4000K
Housing Material	High Grade 6063 Aluminium
Light Guide Plate	PMMA
Operating Temperature	-20 to 50 °C
Input Voltage	AC 200-240V, 47-63Hz
Weight	8.5kg
Dimensions	1195mm x 595mm x 10.5mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply



SWITCH DIM



CORRIDOR



For further information on our products or terms and conditions visit our website
www.qvisled.com or email: sales@qvislighting.com

MODULAR & RECESSED RANGE