

Helios Slimline Downlight (230mm)

Downlight Range

CODE: H65-20-230WW/MPS/QE

QVIS®
LED LIGHTING



3HR
Emergency
3W Battery

IP65

20W
Power

7YR
Warranty*

TP(a)

MPS
Diffuser

2100
Lumens


DALI 2

Switch Dim


1-10V

| Specification | Helios |
|------------------------|------------------------------------------------------------------------------------------------------------------------|
| System Power | 20W [Emergency 3W] |
| Driver Manufacturer | Q-Drive |
| LED Chipset | Samsung |
| Colour Rendering Index | >85 |
| Typical UGR | <17 |
| Lumen Output | 2100Lm [Emergency 315Lm] |
| LED Efficacy | 105 Lm/cW |
| Power Factor | 0.9 |
| IP Rating | IP65 |
| Fire Rating | TP(a) |
| Diffuser | Microprism |
| Dimmable | DALI / Switch-Dim / 1-10V |
| Beam Spread | 90° |
| Colour Temperature | 3000K |
| Housing Material | High Grade 6063 Aluminium Frame |
| Diffuser Material | Polycarbonate |
| Operating Temperature | -20 to +65 °C |
| Input Voltage | AC200-240V, 50-60Hz |
| Cut Out Diameter | 200mm |
| Dimensions | 230mm x 28mm |
| Weight | 0.5kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| Emergency Output | 3 Hours [3W] |
| CE Standards | EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |

TECHNICAL DRAWINGS

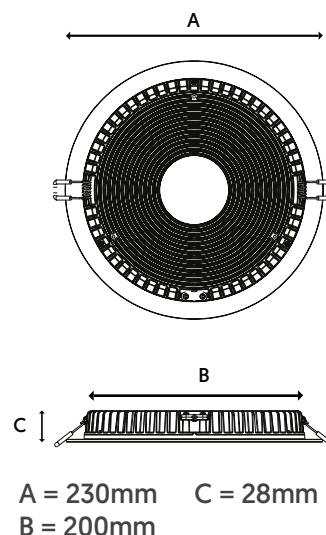

LUMINOUS INTENSITY DISTRIBUTION

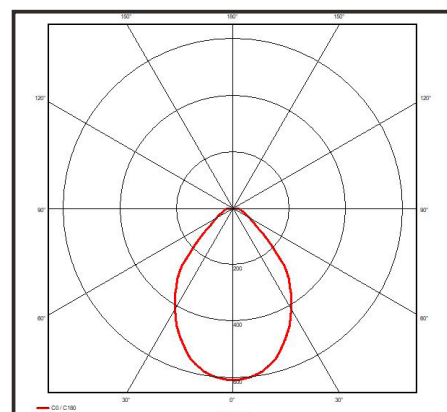

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com