

# Lynx Modular Panel (12x3)

Modular & Recessed Range

CODE: LYNX-ADV-30-12X3WW

**QVIS**<sup>®</sup>  
LED LIGHTING



**30W**  
Power


**7YR**  
Warranty



**OPAL**  
Diffuser

**3900**  
Lumens

## TECHNICAL DRAWINGS

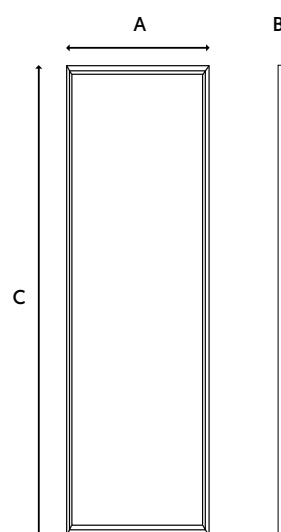


A = 295mm    C = 1195mm  
B = 12mm

Specification	Lynx
System Power	30W
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Colour Rendering Index	>85
Typical UGR	<19
Lumen Output	3900Lm
LED Efficacy	130 Lm/cW
Power Factor	0.95
IP Rating	IP44 from Below
Diffuser	Opal
Dimmable	On Request
Beam Spread	160°
Colour Temperature	3000K
Housing Material	High Grade 6063 Aluminium Frame
Light Guide Plate	PMMA
Operating Temperature	-20 to +65 °C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	1195mm x 295mm x 12mm
Weight	2.7kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

## LUMINOUS INTENSITY DISTRIBUTION

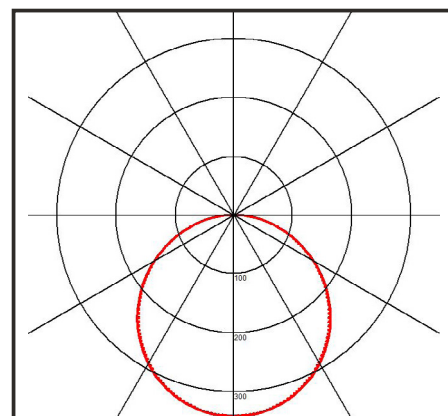

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)