

Scorch Tilt All-In-One Adjustable Fire Rated

Downlight Range

CODE: SFR-8W-TILT

QVIS[®]
LED LIGHTING



8W
Power

5YR
Warranty




Tri
Colour

800
Lumens


*

TECHNICAL DRAWINGS

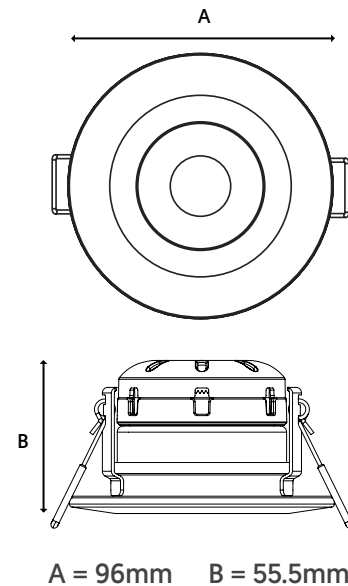

Specification	Scorch Tilt
System Power	8W
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	800Lm
LED Efficacy	100 Lm/cW
Power Factor	>0.85
IP Rating	IP65 from fascia
Fire Rating	BS476-21 (30/60/90 Minute)
Dimmable	Trailing Edge (20 Fittings Max.)
Beam Spread	40°
Tilt Angle	± 20°
Colour Temperature	3000K / 4000K / 6000K
Housing Material	Aluminium & Steel (Fascia)
Magnetic Bezels	White, Polished & Brushed Bezels In Box
LED Type	SMD
Building Registrations	Part L
Input Voltage	AC230V, 50/60Hz
Cut Out Diameter	80mm
Dimensions	96mm x 55.5mm
Weight	0.4kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

LUMINOUS INTENSITY DISTRIBUTION

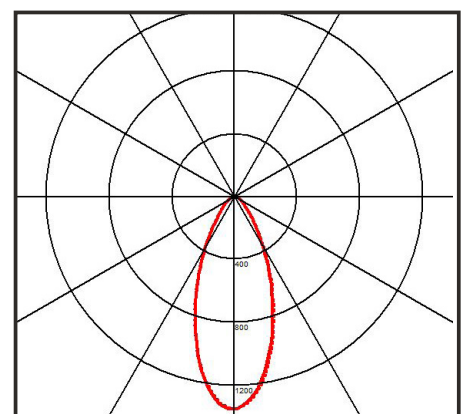

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com