


Lynx Modular Panel (5x5)

Modular & Recessed Range

CODE: LYNX-SLG-25-5X5WW/EM

QVIS[®]
LED LIGHTING

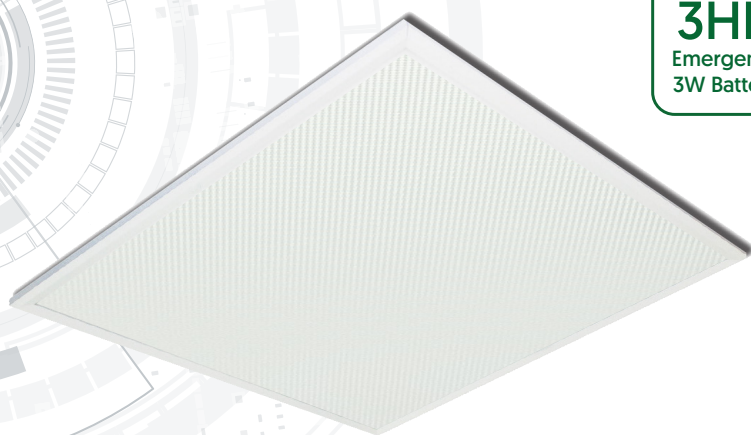

3HR
Emergency
3W Battery



25W
Power

7YR
Warranty




MPS
Diffuser

3000
Lumens


| Specification | Lynx |
|------------------------|--|
| System Power | 25W [Emergency 3W] |
| Driver Manufacturer | Tridonic |
| LED Chipset | Samsung |
| Colour Rendering Index | >85 |
| Typical UGR | <17 |
| Lumen Output | 3000Lm [Emergency 360Lm] |
| LED Efficacy | 120 Lm/cW |
| Power Factor | 0.95 |
| IP Rating | IP44 from Below |
| Diffuser | Microprism |
| Dimmable | On Request |
| Beam Spread | 160° |
| Colour Temperature | 3000K |
| Housing Material | High Grade 6063 Aluminium Frame |
| Light Guide Plate | PMMA |
| Operating Temperature | -20 to +65 °C |
| Input Voltage | AC200-240V, 47-63Hz |
| Dimensions | 495mm x 495mm x 10.5mm |
| Weight | 2.4kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 [Ta 25 °C] |
| Emergency Output | 3 Hours [3W] |
| CE Standards | EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |

TECHNICAL DRAWINGS

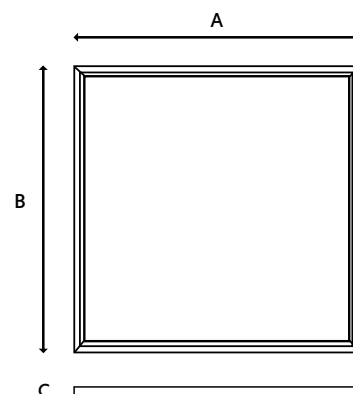

A = 495mm C = 10.5mm
B = 495mm

LUMINOUS INTENSITY DISTRIBUTION

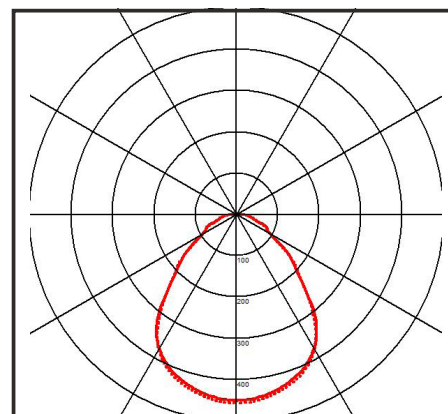

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com