
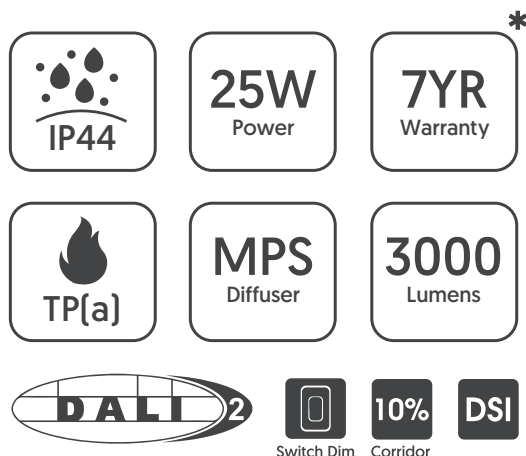


# Lynx Modular Panel (5x5)

Modular & Recessed Range

CODE: LYNX-SLG-25-5X5CW/TD


**QVIS**<sup>®</sup>  
LED LIGHTING

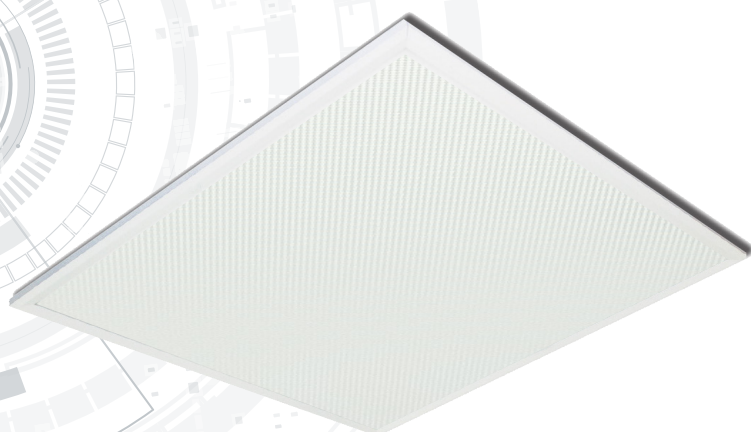

| Specification          | Lynx   |
|------------------------|--|
| System Power           | 25W  |
| Driver Manufacturer    | Tridonic   |
| LED Chipset            | Samsung  |
| Colour Rendering Index | >85  |
| Typical UGR            | <17  |
| Lumen Output           | 3000Lm   |
| LED Efficacy           | 120 Lm/cW  |
| Power Factor           | 0.95   |
| IP Rating              | IP44 from Below  |
| Diffuser               | Microprism   |
| Dimmable               | DALI / Switch-Dim / Corridor / DSI   |
| Beam Spread            | 160°   |
| Colour Temperature     | 6000K  |
| Housing Material       | High Grade 6063 Aluminium Frame  |
| Light Guide Plate      | PMMA   |
| Operating Temperature  | -20 to +65 °C  |
| Input Voltage          | AC200-240V, 47-63Hz  |
| Dimensions             | 495mm x 495mm x 10.5mm   |
| Weight                 | 2.4kg  |
| MacAdam Step           | <3   |
| Lifetime               | 50,000 hours, L70-B10 [Ta 25 °C]   |
| CE Standards           | EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives          | LVD, EMC, ERP & RoHS   |


\* Warranty terms and conditions apply

## TECHNICAL DRAWINGS

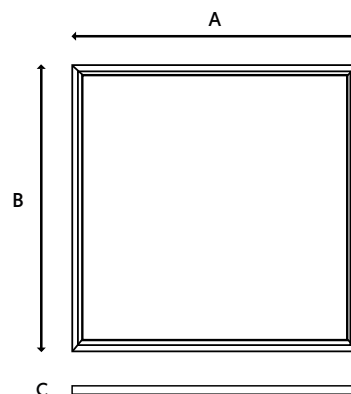

A = 495mm    C = 10.5mm  
B = 495mm

## LUMINOUS INTENSITY DISTRIBUTION

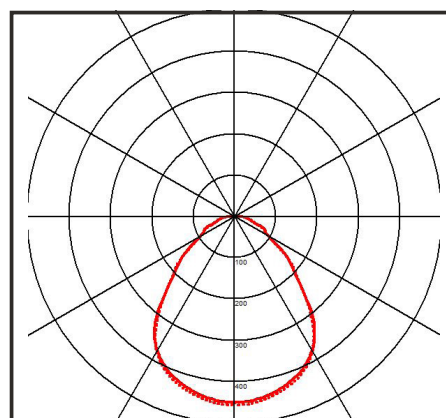

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)