

Glow UFO High Bay


Industrial Range

CODE: GLOWUFO-240NW/EM

QVIS®
LED LIGHTING



TECHNICAL DRAWINGS

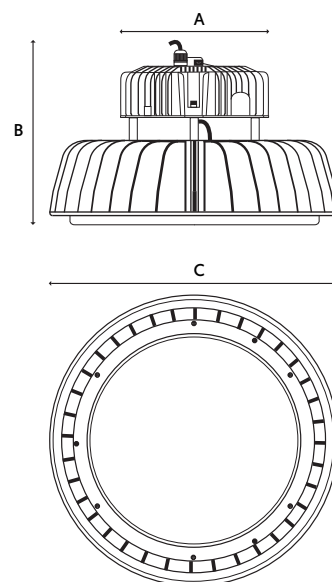


A = 150mm C = 320mm
B = 180mm

Specification	Glow UFO
System Power	240W [Emergency 5W]
Driver Manufacturer	Lifud
LED Chipset	Samsung
Colour Rendering Index	>85
Lumen Output	33600Lm [Emergency 700Lm]
LED Efficacy	140 Lm/cW
Power Factor	>0.9
Dimmable	1-10V
IP Rating	IP65
IK Rating	IK08
Colour Temperature	4000K
Beam Spread	120°
Housing Material	Aluminium
Diffuser Material	Tempered Glass
Operating Temperature	-20 to +50°C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	320mm x 180mm
Weight	5.9kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [5W]
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

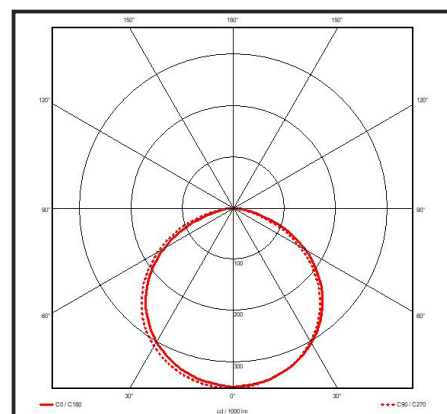

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com