NCF Robust Vapour Proof Linear

Industrial Range

CODE: NCF2-55-1500CW













TECHNICAL DRAWINGS

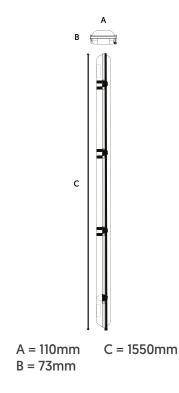

LUMINOUS INTENSITY DISTRIBUTION

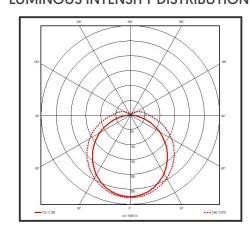

Specification	NCF
System Power	55W
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Colour Rendering Index	>85
Lumen Output	6600Lm
LED Efficacy	120 Lm/cW
Power Factor	0.958
Dimmable	On Request
IP Rating	IP65
Colour Temperature	6000K
Beam Spread	120°
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +65 °C
Input Voltage	AC200-240V, 47-63Hz
Dimensions	1550mm x 110mm x 73mm
Weight	3kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & ROHS

^{*} Warranty terms and conditions apply