




CLARUS CONVENTIONAL DOWNLIGHT

CL228-25-FR

QVIS[®]

LIGHTING & SECURITY



TRIDONIC
enlightening your ideas

Driver as Standard

SAMSUNG


LED's inside

MODULAR & RECESSED RANGE

Specification	Clarus Downlight - 228
System Power	25W
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Colour Rendering Index	>80
Typical UGR	<22
Lumen Output	2625Lm
LED Efficacy	105 Lm/cW
Dimmable	On request
Power Factor	>0.9
IP Rating	IP54
IK Rating	IK08
Beam Spread	60 °
Colour Temperature	3000K/4000K/5700K
Housing Material	Aluminium/Polycarbonate
Reflector Type	Faceted
Operating Temperature	-20 to 45 °C
Input Voltage	AC90-305V
Cut Out	205mm
Dimensions	ø228mm x 98mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

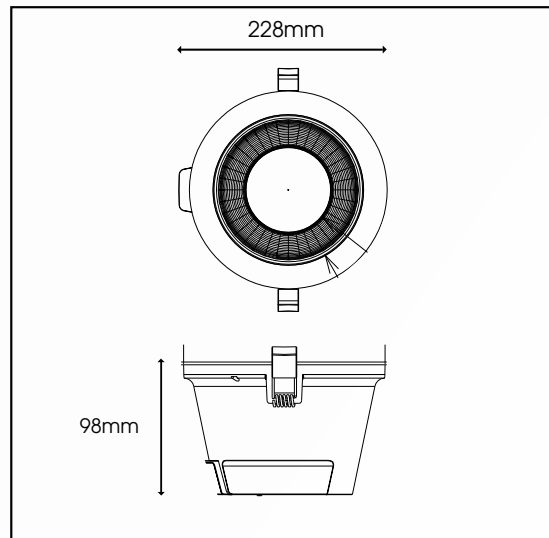

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

