


SERENE PANEL (6x6)

SER-35-6X6NW

QVIS®

LIGHTING & SECURITY

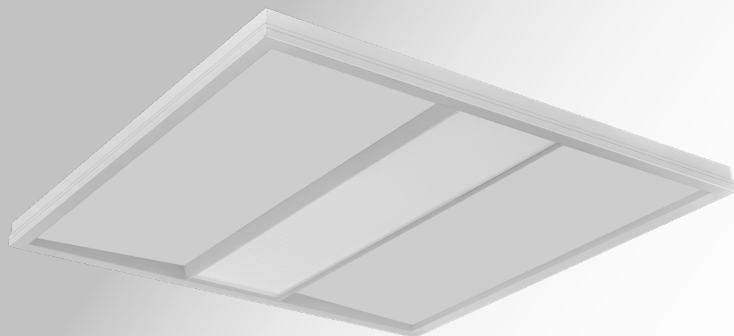

35W
POWER

6YR
WARRANTY
2YR
ON-SITE



MPS
DIFFUSER

3675
LUMENS


TRIDONIC
enlightening your ideas

Driver as Standard


SAMSUNG

LED's inside

TECHNICAL DRAWINGS

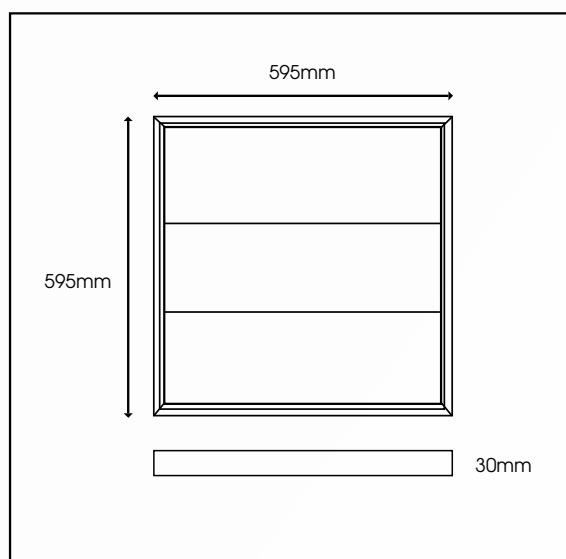

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

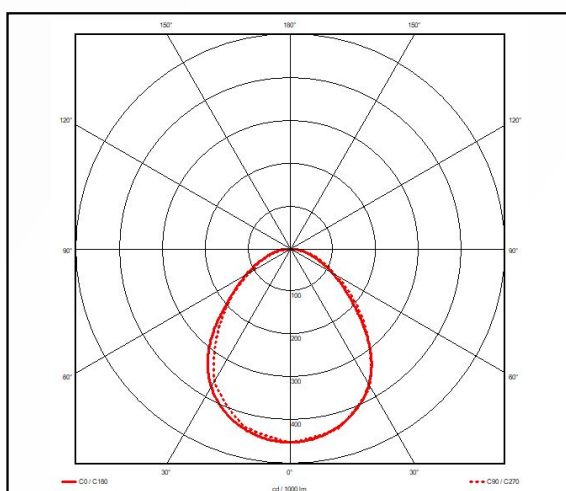

Specification	Serene
System Power	35W
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Diffuser	Microprism
Colour Rendering Index	>85
Typical UGR	<17
LED Efficacy	105 Lm/cW
Lumen Output	3675Lm
Fire Rating	TP(a)
Dimmable	On request
Power Factor	>0.9
IP Rating	IP44 from below
Beam Spread	90 °
Colour Type	Single
Colour Temperature	4000K
Operating Temperature	-20 to 40 °C
Input Voltage	AC 220-240V
Weight	2.8kg
Dimensions	595mm x 595mm x 30mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

MODULAR & RECESSED RANGE