





# SERENE PANEL (6x6)

SER-35-6X6NW/EM

QVIS®

LIGHTING & SECURITY

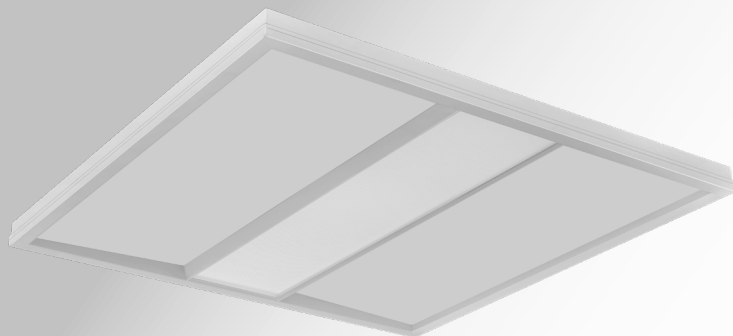


TRIDONIC  
enlightening your ideas

Driver as Standard


SAMSUNG

LED's inside

## TECHNICAL DRAWINGS

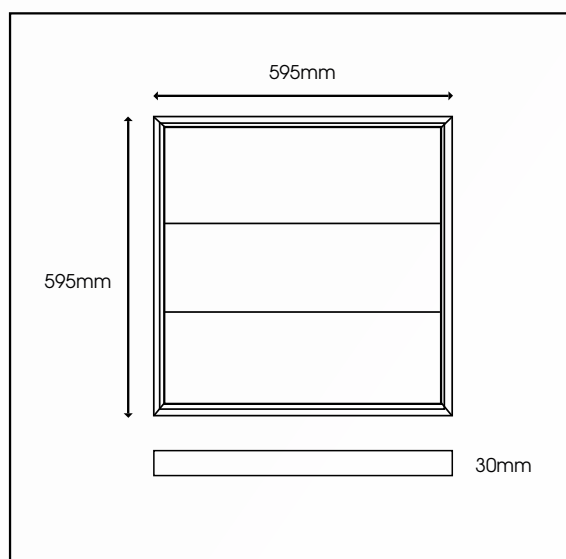

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

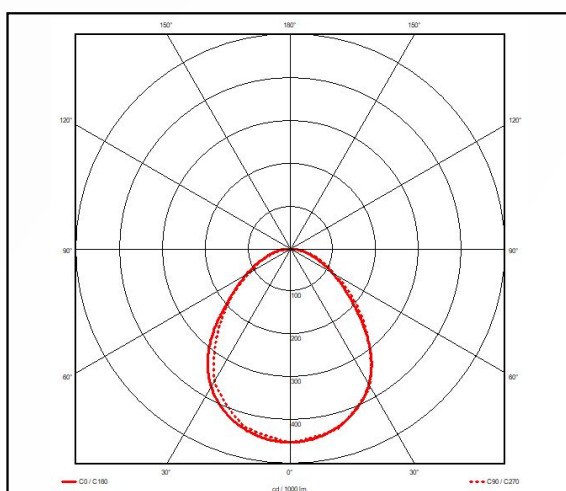

Specification	Serene
System Power	35W (Emergency 3W)
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Diffuser	Microprism
Colour Rendering Index	>85
Typical UGR	<17
LED Efficacy	105 Lm/cW
Lumen Output	3675Lm (Emergency 315Lm)
Fire Rating	TP(a)
Dimmable	On request
Power Factor	>0.9
IP Rating	IP44 from below
Beam Spread	90 °
Colour Type	Single
Colour Temperature	4000K
Operating Temperature	-20 to 40 °C
Input Voltage	AC 220-240V
Weight	2.8kg
Dimensions	595mm x 595mm x 30mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
Emergency Output	3 Hours (3W)*
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

\*For emergency products with a rated service life of < 50,000 operating hours, QVIS offers a 5-year warranty period on the luminaire and 1-year warranty period on the battery pack

For further information on our products or terms and conditions visit our website  
www.qvisled.com or email: sales@qvislighting.com

MODULAR & RECESSED RANGE