

## External



IP65 Ingress Protection



Wattage Switchable




2Kv Surge Protection




Tri-Colour (3000K/3500K/4000K)

Dimensions with Base  
[See QP-100-BASE]

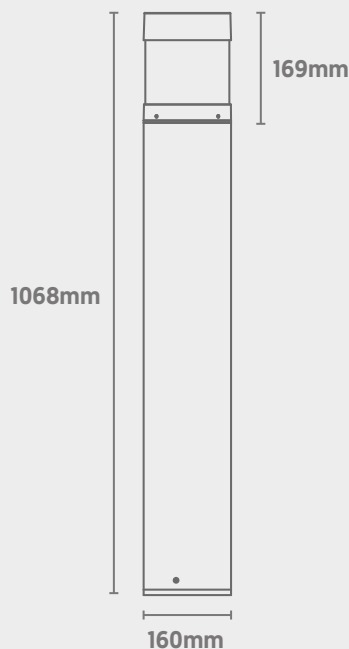

Light Source  
Energy Rating

## Photometric Data

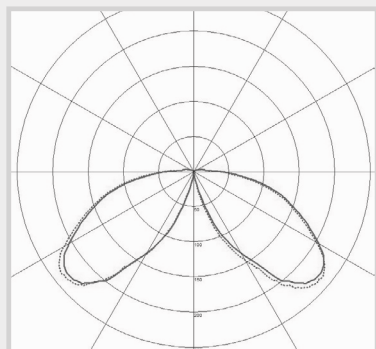

# QPath

## Bollard Luminaire

CODE: QP-CONE-WS-DC/FL/EM

**QVIS**<sup>®</sup>  
LED LIGHTING



| Power (Selectable) | Efficacy | Output                   | Kelvin                               |
|--------------------|----------|--------------------------|--------------------------------------|
| 12W [Emergency 3W] | 130Lm/cW | 1560Lm [Emergency 390Lm] | Tri-Colour:<br>3000K, 3500K or 4000K |
| 16W [Emergency 3W] | 130Lm/cW | 2080Lm [Emergency 390Lm] |                                      |
| 22W [Emergency 3W] | 130Lm/cW | 2860Lm [Emergency 390Lm] |                                      |

## Technical

|                         |                                                                                                          |
|-------------------------|----------------------------------------------------------------------------------------------------------|
| Input Voltage           | AC 120-277V                                                                                              |
| Colour Rendering Index  | >80                                                                                                      |
| Power Factor            | >0.9                                                                                                     |
| Operating Temp.         | -40 to +50°C                                                                                             |
| Materials               | Die-Cast Aluminium                                                                                       |
| IP Rating               | IP65                                                                                                     |
| Surge Protection        | 2Kv                                                                                                      |
| Dimmable                | On Request                                                                                               |
| Dimensions with Base    | 1068mm x 160mm                                                                                           |
| Dimensions without Base | 169mm x 160mm                                                                                            |
| Weight                  | 2.555kg [5.555kg with Base]                                                                              |
| MacAdam Step            | <3                                                                                                       |
| Emergency Output        | 3 Hours [3W]                                                                                             |
| Lifetime                | 50,000 hours, L90-B10<br>(Ta 25 °C)                                                                      |
| CE Standards            | EN60598-1, EN62493, EN55015, EN61547,<br>EN61000-3-2, EN61000-3-3, EN62722-1,<br>EN62722-2-1 and EN50581 |
| CE Directives           | LVD, EMC, ERP & RoHS                                                                                     |