

External



IP65 Ingress Protection



Wattage Switchable




2Kv Surge Protection




Tri-Colour (3000K/3500K/4000K)

Dimensions with Base
[See QP-100-BASE]

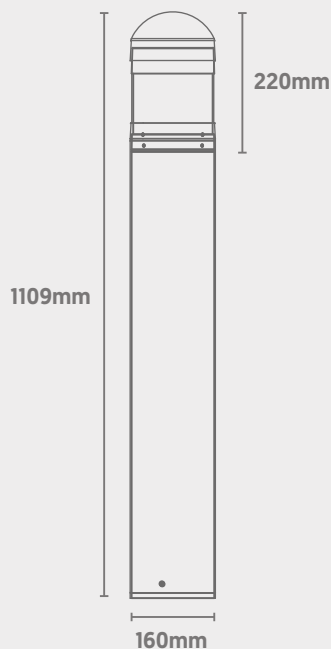

Light Source
Energy Rating

Photometric Data

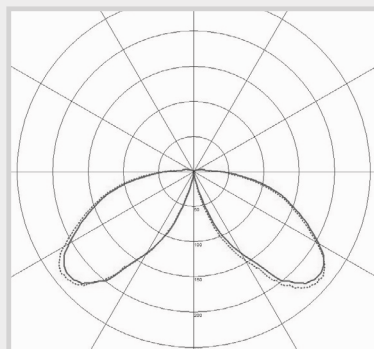

QPath

Bollard Luminaire

CODE: QP-CONE-WS-DC/DO/EM

QVIS[®]
LED LIGHTING



Power (Selectable)	Efficacy	Output	Kelvin
12W [Emergency 3W]	130Lm/cW	1560Lm [Emergency 390Lm]	Tri-Colour: 3000K, 3500K or 4000K
16W [Emergency 3W]	130Lm/cW	2080Lm [Emergency 390Lm]	
22W [Emergency 3W]	130Lm/cW	2860Lm [Emergency 390Lm]	

Technical

Input Voltage	AC 120-277V
Colour Rendering Index	>80
Power Factor	>0.9
Operating Temp.	-40 to +50°C
Materials	Die-Cast Aluminium
IP Rating	IP65
Surge Protection	2Kv
Dimmable	On Request
Dimensions with Base	1109mm x 160mm
Dimensions without Base	220mm x 160mm
Weight	2.605kg (5.605kg with Base)
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS