

External



IP66 Ingress Protection



IK08 Tempered Glass Lens




10Kv Surge Protection




Asymmetric Beam

Dimensions

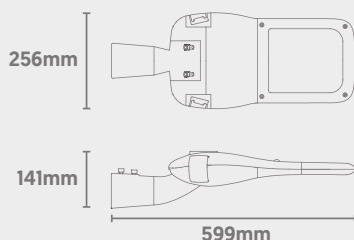

Light Source
Energy Rating

Photometric Data

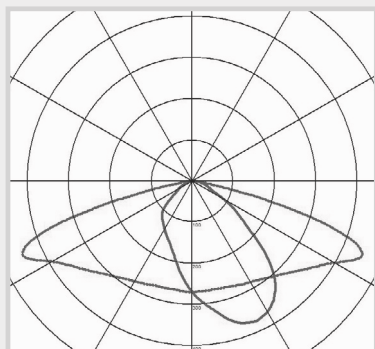

QStreet Pro Gen 2

Street Lighting

CODE: QSTREET2-PRO-100NW/FX/D

QVIS[®]
LED LIGHTING



Power	Efficacy	Output	Kelvin
100W	170Lm/cW	17000Lm	4000K

Technical

Input Voltage	AC 100-277V
Colour Rendering Index	>70
Beam Spread	110°*150°
Operating Temp.	-40 to +50°C
Materials	Aluminium with Tempered Glass
IP Rating	IP66
IK Rating	IK08 [Glass]
Surge Protection	10Kv
Dimmable	DALI 2.0
Dimensions	256mm x 141mm x 599mm
Weight	4.3kg
MacAdam Step	<3
Lifetime	61,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS