

## External



IP66 Ingress Protection



Aluminium Housing




135 High LED Efficacy




Asymmetric Beam

### Dimensions

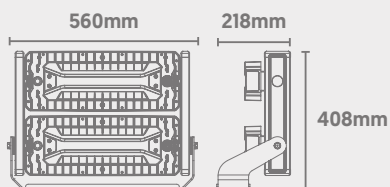

Light Source  
Energy Rating

### Photometric Data

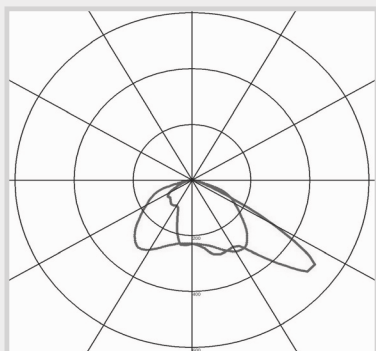


# QSport Gen 2

## High-Power Flood Light

CODE: QSPORT2-630CW/AS/D

**QVIS**<sup>®</sup>  
LED LIGHTING

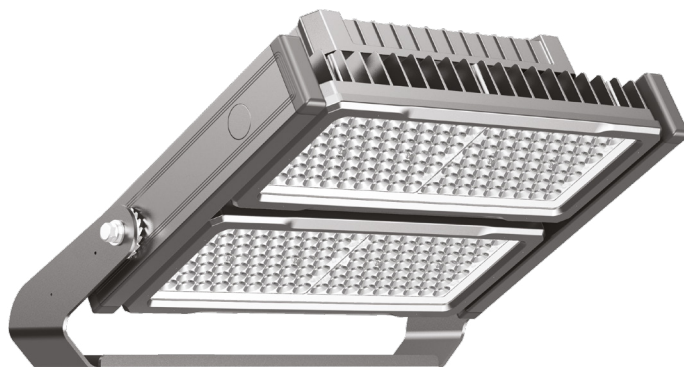

| Power | Efficacy | Output  | Kelvin |
|-------|----------|---------|--------|
| 630W  | 135lm/cW | 85050Lm | 5700K  |

### Technical

|                        |                                                                                                                        |
|------------------------|------------------------------------------------------------------------------------------------------------------------|
| Input Voltage          | AC 100-277V                                                                                                            |
| Colour Rendering Index | >70                                                                                                                    |
| Beam Spread            | 140°x50°                                                                                                               |
| Power Factor           | 0.95                                                                                                                   |
| Operating Temp.        | -20 to +40°C                                                                                                           |
| Materials              | Die-Cast & Polycarbonate                                                                                               |
| IP Rating              | IP66                                                                                                                   |
| Dimmable               | DALI 2.0                                                                                                               |
| Dimensions             | 560mm x 408mm x 218mm                                                                                                  |
| Weight                 | 14kg                                                                                                                   |
| MacAdam Step           | <3                                                                                                                     |
| Lifetime               | 50,000 hours, L70-B10<br>(Ta 25 °C)                                                                                    |
| CE Standards           | EN60598-1, EN 60598 2-5, EN62493,<br>EN55015, EN61547, EN61000-3-2, EN61000-3-3,<br>EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives          | LVD, EMC, ERP & RoHS                                                                                                   |