


Glow UFO Ultra Switchable High Bay

CODE: GU-ULTRA-WS-TC

-  **IP65 Ingress Protection**
-  **IK08 Impact Resistance**
(via Polycarbonate Diffuser)
-  **Wattage Switchable**
-  **Tri-Colour** (4000K/5000K/5700K)

Dimensions

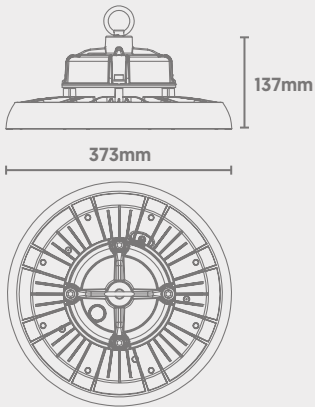

Wattage and Colour Temperature
Switches Behind Protective Tab
on Integral Driver



Power (Selectable)	Efficacy	Output	Kelvin
100W	170Lm/cW	17000Lm	Tri-Colour: 4000K, 5000K or 5700K
150W	170Lm/cW	25500Lm	
200W	170Lm/cW	34000Lm	

Technical

Input Voltage	AC 100-277V
Colour Rendering Index	>80
Beam Spread	90°
Power Factor	>0.95
Operating Temp.	-35 to +50°C
Materials	Die-Cast & Polycarbonate
IP Rating	IP65
IK Rating	IK08
Cable Flex	1.5m
Dimmable	1-10V (as Standard)
Dimensions	373mm x 137mm
Weight	3.5kg
MacAdam Step	<3
Lifetime	60,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

A T G C Light Source
Energy Rating

Photometric Data

