


## Glow UFO Ultra Switchable High Bay

CODE: GU-ULTRA-WS-TC/EM


-  IP65 Ingress Protection
-  IK08 Impact Resistance  
(via Polycarbonate Diffuser)
-  Wattage Switchable
-  Tri-Colour (4000K/5000K/5700K)

### Dimensions

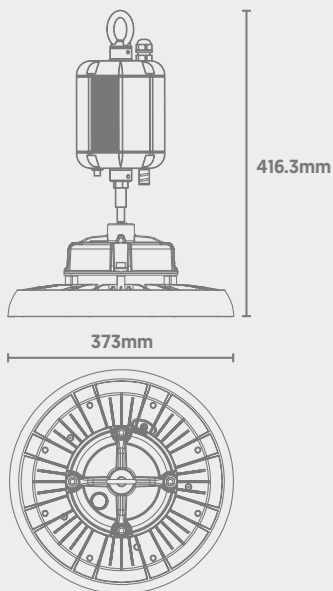

**A**  
**T**  
**G** **C** Light Source  
Energy Rating

### Photometric Data

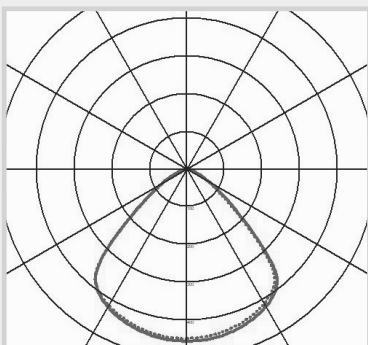

Wattage and Colour Temperature  
Switches Behind Protective Tab  
on Integral Driver

**3HR**  
EMERGENCY  
DURATION

**7**  
YEARS  
WARRANTY  
+ 2 YEAR ON SITE\*



Power (Selectable)	Efficacy	Output	Kelvin
100W (Emergency 5W)	170Lm/cW	17000Lm (Emergency 850Lm)	Tri-Colour: 4000K, 5000K or 5700K
150W (Emergency 5W)	170Lm/cW	25500Lm (Emergency 850Lm)	
200W (Emergency 5W)	170Lm/cW	34000Lm (Emergency 850Lm)	

### Technical

Input Voltage	AC 100-277V
Colour Rendering Index	>80
Beam Spread	90°
Power Factor	>0.95
Operating Temp.	-35 to +50°C
Materials	Die-Cast & Polycarbonate
IP Rating	IP65
IK Rating	IK08
Cable Flex	1.5m
Dimmable	1-10V (as Standard)
Dimensions (with Battery)	373mm x 416.3mm
Weight	7.1kg
MacAdam Step	<3
Emergency Output	3 Hours (5W)
Lifetime	60,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS