

## Baylite Pro Low Bay

CODE: BP-WS-NW/EM


-  IP65 Ingress Protection
-  IK10 Impact Resistance
-  Wattage Switchable
-  1-10V Dimmable (as Standard)



**3HR**  
EMERGENCY  
DURATION

**7**  
YEARS  
WARRANTY  
+ 2 YEAR ON SITE\*

### Dimensions

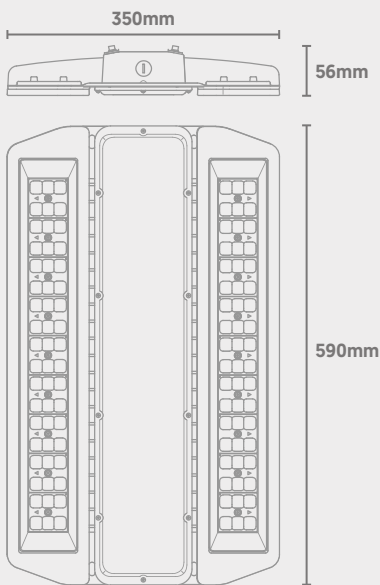

Wattage switchable from 0 to 200W via dial on back of fitting.

Power (Selectable)	Efficacy	Output	Kelvin
50W [Emergency 5W]	140Lm/cW	7000Lm [Emergency 700Lm]	4000K
75W [Emergency 5W]	140Lm/cW	10500Lm [Emergency 700Lm]	
100W [Emergency 5W]	140Lm/cW	14000Lm [Emergency 700Lm]	
125W [Emergency 5W]	140Lm/cW	17500Lm [Emergency 700Lm]	
150W [Emergency 5W]	140Lm/cW	21000Lm [Emergency 700Lm]	
175W [Emergency 5W]	140Lm/cW	24500Lm [Emergency 700Lm]	
200W [Emergency 5W]	140Lm/cW	28000Lm [Emergency 700Lm]	

### Technical

Input Voltage	AC 100-240V
Colour Rendering Index	>80
Beam Angle	90°
Power Factor	0.97
Operating Temp.	-20 to +45°C
Materials	Aluminium & Tempered Glass
IP Rating	IP65
IK Rating	IK10
Dimmable	1-10V (as Standard)
Dimensions	590mm x 350mm x 56mm
Weight	7.81kg
MacAdam Step	<3
Emergency Output	3 Hours [5W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

### Photometric Data

