

Surface & Suspended



High Ball-Impact Resistance
(DIN 18032-3)



Flicker-Free




High LED Efficacy




IK10 Impact Resistance

Dimensions

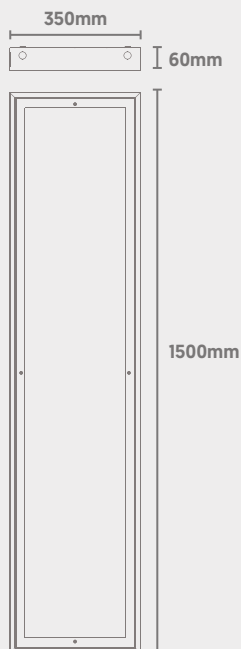

D Light Source Energy Rating

Photometric Data

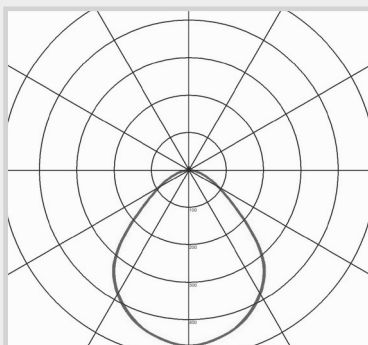

SportPro

Linear

QVIS[®]
LED LIGHTING

CODE: SPL-150-1500NW



Power	Efficacy	Output	Kelvin
150W	140lm/cW	21000lm	4000K

Technical

Input Voltage	AC 220-240V
Colour Rendering Index	>80
Beam Spread	80°
Power Factor	>0.9
Operating Temp.	-20 to +40°C
Materials	Metal & Polycarbonate
Ball-Impact Resistance	DIN 18032-3
IK Rating	IK10
Dimmable	On Request
Dimensions	1500mm x 350mm x 60mm
Weight	10.32kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS