

External



IP66 Ingress Protection



Aluminium Housing




1.5m Cable Flex




Asymmetric Beam

Dimensions

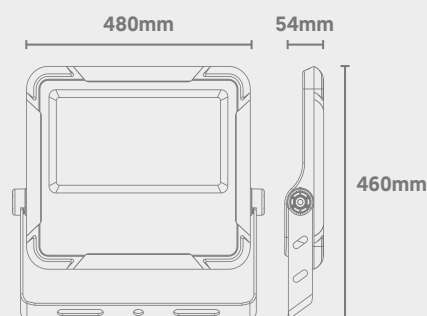

Light Source
Energy Rating

Photometric Data

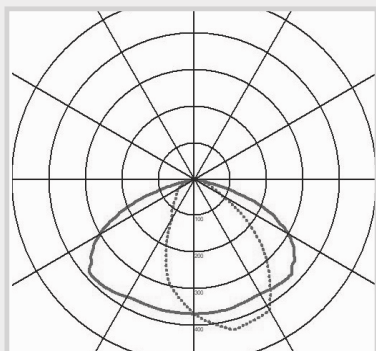

QFlood Commercial Gen 2

Asymmetric Flood Light

CODE: QFLOOD2-250CW/AS/D

QVIS[®]
LED LIGHTING



Power	Efficacy	Output	Kelvin
250W	150lm/cW	37500Lm	5700K

Technical

Input Voltage	AC 100-277V
Colour Rendering Index	>80
Beam Spread	150°*70°
Power Factor	>0.95
Operating Temp.	-25 to +50°C
Materials	Aluminium & Glass
IP Rating	IP66
Dimmable	DALI 2.0
Cable Flex	1.5m
Dimensions	480mm x 460mm x 54mm
Weight	5.85kg
MacAdam Step	<3
Lifetime	60,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS