

Industrial



IP66 Ingress Protection



IK08 Impact Resistance




Polycarbonate Housing




301 Stainless Steel Clips

Dimensions

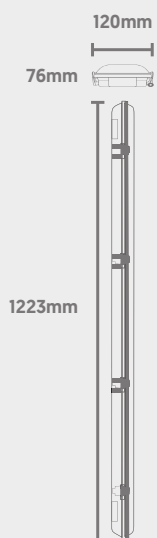

Light Source
Energy Rating

Photometric Data

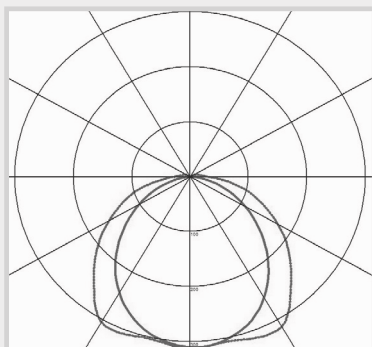

QStorm

Vapour Proof

CODE: QSTORM-40-1200NW/EM

QVIS[®]
LED LIGHTING



3HR
EMERGENCY
DURATION

5
YEARS
WARRANTY
+ 1 YEAR ON SITE *

Power	Efficacy	Output	Kelvin
40W [Emergency 3W]	130Lm/cW	5200Lm [Emergency 390Lm]	4000K

Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Beam Spread	120°
Power Factor	>0.9
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP66
IK Rating	IK08
Dimmable	On Request
Dimensions	1223mm x 120mm x 76mm
Weight	2.13kg
MacAdam Step	<3
Lifetime	3 Hours [3W]
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS