

## Surface & Suspended



Low Glare Diffuser



BESA Mounting Points




Steel Housing




Conduit Side Entry

### Dimensions

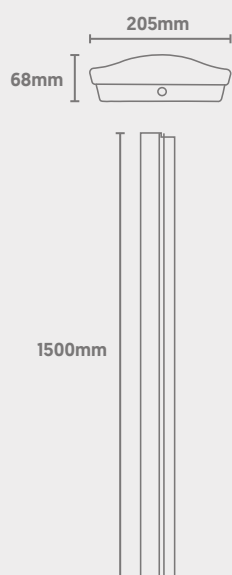

Light Source  
Energy Rating

### Photometric Data

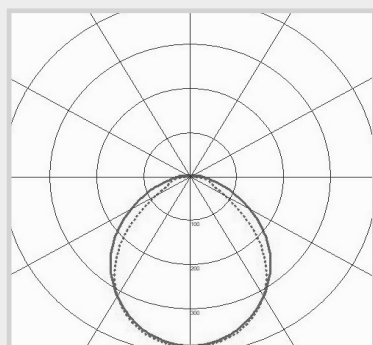

# Proteus

## Prismatic Linear

CODE: PTS-27-1500TC/MPS/EM

**QVIS**<sup>®</sup>  
LED LIGHTING



**3HR**  
EMERGENCY  
DURATION

**7**  
YEARS  
WARRANTY  
+ 2 YEAR ON SITE \*

| Power              | Efficacy | Output                   | Kelvin                                  |
|--------------------|----------|--------------------------|-----------------------------------------|
| 27W [Emergency 3W] | 135Lm/cW | 3645Lm [Emergency 405Lm] | Tri-Colour:<br>3000K, 4000K or<br>6000K |

### Technical

|                        |                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------|
| Input Voltage          | AC 220-240V                                                                                              |
| Diffuser Type          | Microprismatic                                                                                           |
| Colour Rendering Index | >85                                                                                                      |
| Power Factor           | 0.9821                                                                                                   |
| Operating Temp.        | -20 to +65°C                                                                                             |
| Materials              | Steel & Polycarbonate                                                                                    |
| IP Rating              | IP40                                                                                                     |
| Dimmable               | On Request                                                                                               |
| Dimensions             | 1500mm x 205mm x 68mm                                                                                    |
| Weight                 | 4.17kg                                                                                                   |
| MacAdam Step           | <3                                                                                                       |
| Emergency Output       | 3 Hours [3W]                                                                                             |
| Lifetime               | 50,000 hours, L90-B10<br>(Ta 25 °C)                                                                      |
| CE Standards           | EN60598-1, EN62493, EN55015, EN61547,<br>EN61000-3-2, EN61000-3-3, EN62722-1,<br>EN62722-2-1 and EN50581 |
| CE Directives          | LVD, EMC, ERP & RoHS                                                                                     |