


Surface & Suspended



Low Glare Diffuser



BESA Mounting Points




Steel Housing




Conduit Side Entry

Dimensions

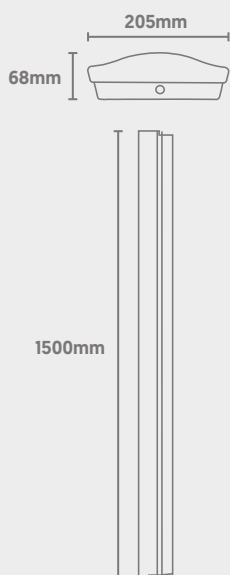

Light Source Energy Rating

Photometric Data

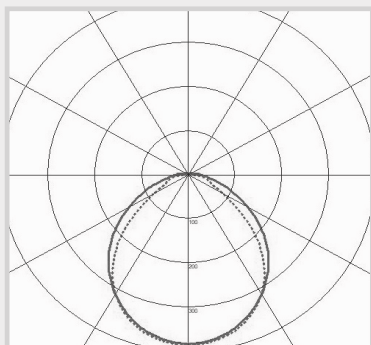

Proteus

Prismatic Linear

CODE: PTS-27-1500TC/MPS/EM/PIR

QVIS[®]
LED LIGHTING



3HR
EMERGENCY
DURATION

7
YEARS
WARRANTY
+ 2 YEAR ON SITE *

Power	Efficacy	Output	Kelvin
27W [Emergency 3W]	135Lm/cW	3645Lm [Emergency 405Lm]	Tri-Colour: 3000K, 4000K or 6000K

Technical

Input Voltage	AC 220-240V
Diffuser Type	Microprismatic
Colour Rendering Index	>85
Power Factor	0.9821
Operating Temp.	-20 to +65°C
Materials	Steel & Polycarbonate
IP Rating	IP40
Dimmable	On Request
Dimensions	1500mm x 205mm x 68mm
Weight	4.17kg
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS