


## Surface & Suspended



Low Glare Diffuser



BESA Mounting Points



Steel Housing




Conduit Side Entry

### Dimensions



Light Source Energy Rating

### Photometric Data

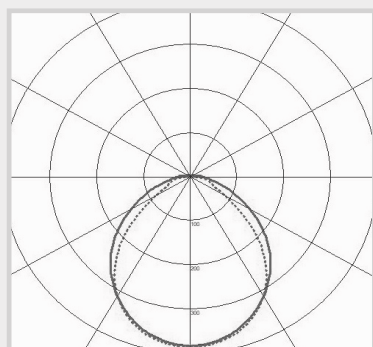

# Proteus

## Prismatic Linear

CODE: PTS-38-1500TC/MPS/EM/PIR

**QVIS**<sup>®</sup>  
LED LIGHTING



PIR Sensor Info  
on Following Page



Power	Efficacy	Output	Kelvin
38W [Emergency 3W]	135Lm/cW	5130Lm [Emergency 405Lm]	Tri-Colour: 3000K, 4000K or 6000K

### Technical

Input Voltage	AC 220-240V
Diffuser Type	Microprismatic
Colour Rendering Index	>85
Power Factor	0.9821
Operating Temp.	-20 to +65°C
Materials	Steel & Polycarbonate
IP Rating	IP40
Dimmable	On Request
Dimensions	1500mm x 205mm x 68mm
Weight	4.17kg
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

## Surface & Suspended



Day & Night Operation



10m Detection Distance




360° Detection Range



Up to 6m Install Height  
(2m to 6m is recommended for optimal performance)

### Dimensions

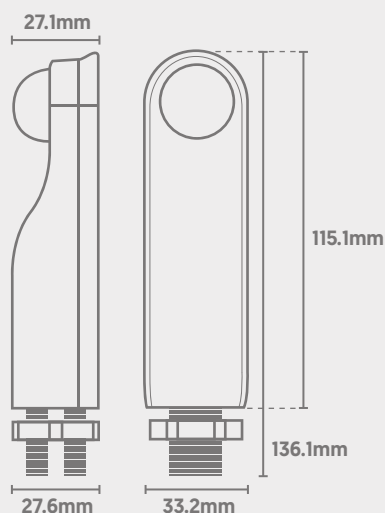

# Proteus

## PIR Sensor



### PIR Specifications

Daylight Sensor	<3Lx to 2000Lx (Adjustable)
Hold Time	Min: 10s±3s; Max: 30min±2min
Stand-By Period	5min, 10min, 15min, 30min, 60min, +∞
Detection Range	50% / 75% / 100% (360°)
Detection Distance	Up to 10m (24°C)
Detection Moving Speed	0.5-1.5m/s
Automatic Lighting Range	10Lx to 300Lx
Stand-By Dimming Level	OFF / 10% / 20% / 30%



### Technical

Power Source	AC 220-240V
Power Frequency	50/60 Hz
Maximum Switching	6A
Rated Load	Between 500W and 1200W
Power Consumption	Approximately 0.5W
Cable Specification	18AWG-1007
Operating Temperature	-20 to +40°C
Operating Humidity	<93% RH
Installation Height	2m to 6m
Material	Polycarbonate
IP Rating	IP65 After Installation

## Surface & Suspended



Day & Night Operation



10m Detection Distance




360° Detection Range



Up to 6m Install Height  
(2m to 6m is recommended for optimal performance)

### Dimensions

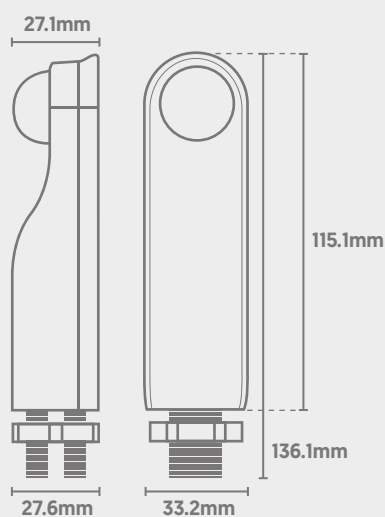


## Proteus

### PIR Sensor

**QVIS**<sup>®</sup>  
LED LIGHTING

### Detection Diagram

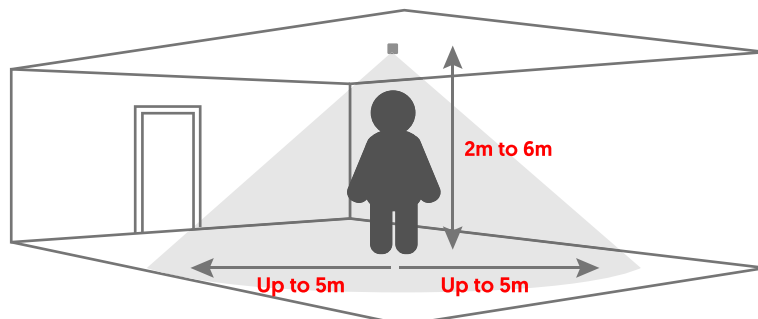

### Wiring Diagram

