

Surface & Suspended



IP66 Ingress Protection



IK10 Impact Resistance




TP(a) Fire Rating




Side Conduit Entry Points Under Tab (New Housing)

Dimensions

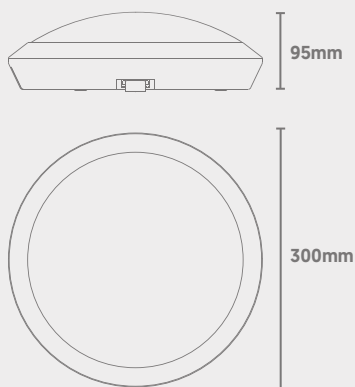

Light Source
Energy Rating

Photometric Data

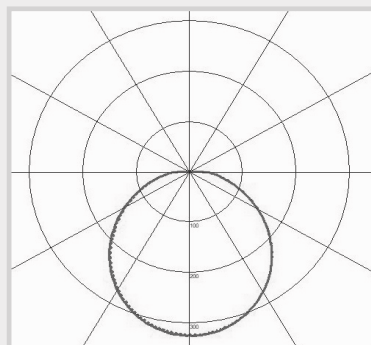

Vex Gen 2 Commercial Bulkhead

CODE: VEX2-10/15-300NW/EM

QVIS[®]
LED LIGHTING



Power (Selectable)	Efficacy	Output	Kelvin
10W [Emergency 3W]	105Lm/cW	1050Lm [Emergency 315Lm]	4000K
15W [Emergency 3W]	105Lm/cW	1575Lm [Emergency 315Lm]	

Technical

Input Voltage	AC 220-240V
Colour Rendering Index	>80
Power Factor	>0.9
Operating Temp.	-20 to +30°C
Materials	Polycarbonate
IP Rating	IP66
IK Rating	IK10
Fire Rating	TP(a)
Dimmable	On Request
Dimensions	300mm x 95mm
Weight	0.77kg
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS