

Surface &  
Suspended

# GlowDec

## Pendant High Bay

**QVIS**<sup>®</sup>  
LED LIGHTING

CODE: GD-PRO-WS-CCT



Dual-Colour (3000K/4000K)



Polycarbonate Lens




Aluminium Housing




Wattage Switchable

### Dimensions

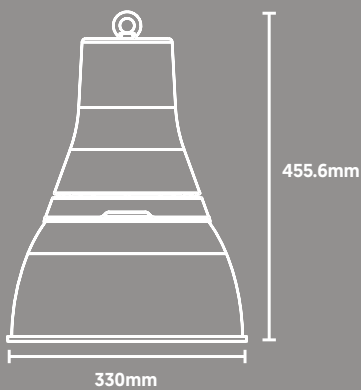

DECORATIVE RANGE

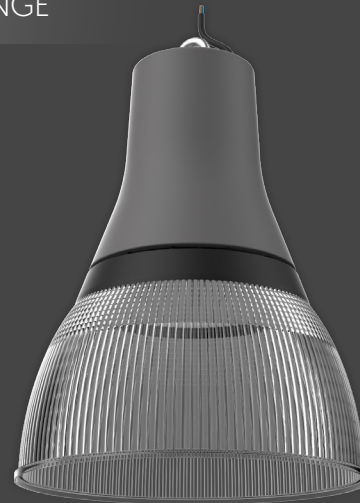

Power (Selectable)	Efficacy	Output	Kelvin
25W	140Lm/cW	3500Lm	<b>Dual-Colour:</b> 3000K or 4000K
40W	140Lm/cW	5600Lm	
60W	140Lm/cW	8400Lm	
80W	140Lm/cW	11200Lm	

### Technical

<b>Input Voltage</b>	AC 120-277V
<b>Colour Rendering Index</b>	>80
<b>Beam Spread</b>	90°
<b>Power Factor</b>	>0.95
<b>Operating Temp.</b>	-30 to +45°C
<b>Materials</b>	Aluminium & Polycarbonate
<b>IP Rating</b>	IP20
<b>IK Rating</b>	IK06
<b>Suspension &amp; Cable</b>	3m AC Cable/Suspension
<b>Dimmable</b>	On Request
<b>Dimensions</b>	455.6mm x 330mm
<b>Weight</b>	2kg
<b>MacAdam Step</b>	<3
<b>Lifetime</b>	50,000 hours, L70-B10 (Ta 25 °C)
<b>CE Standards</b>	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
<b>CE Directives</b>	LVD, EMC, ERP & RoHS

**A t G** **D** Light Source  
Energy Rating

### Photometric Data

