

Surface &
Suspended

Ikon W

Wall Mounted Luminaire

QVIS[®]
LED LIGHTING

CODE: IKON-W/1-10V

DECORATIVE RANGE



Direct/Indirect Output





UGR Compliant Diffuser



Aluminium Housing

Dimensions

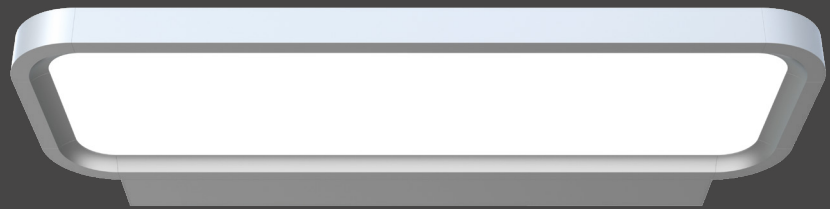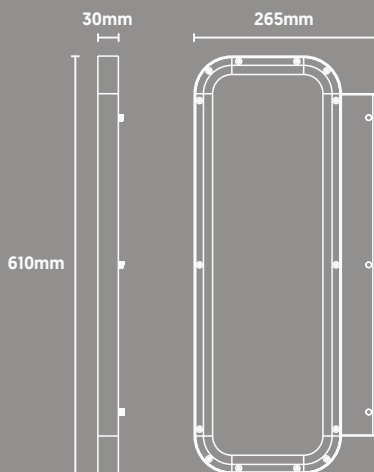

Power	Efficacy	Output	Kelvin
40W	85Lm/cW	1700Lm ↑ 1700Lm ↓	4000K

Technical

Input Voltage	AC 100-270V
Direct/Indirect	50% ↑ / 50% ↓
Colour Rendering Index	>80
Power Factor	>0.9
Operating Temp.	-20 to +45°C
Materials	Aluminium & Polycarbonate
IP Rating	IP20
Dimmable	1-10V
Dimensions	610mm x 265mm x 30mm
Weight	4.05kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

A T G F Light Source
Energy Rating

Photometric Data

