


## QStorm Vapour Proof

CODE: QS-BOLT-WS-1800TC

- High LED Efficacy
- IK08 Impact Resistance
- Plug & Play Module (Emergency & Microwave)
- Tri-Colour (3000K/4000K/5000K)

### Dimensions

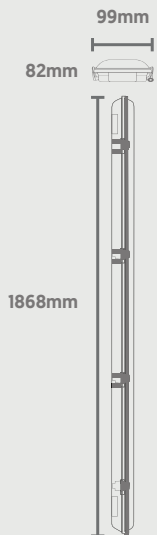

Power	Efficacy	Output	Kelvin
35W	170Lm/cW	5950Lm	Tri-Colour: 3000K, 4000K or 5000K
60W	170Lm/cW	10200Lm	
70W	170Lm/cW	11900Lm	

### Technical

Input Voltage	AC 220-240V
Colour Rendering Index	>80
Beam Spread	120°
Power Factor	>0.9
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP66
IK Rating	IK08
Dimmable	On Request
Dimensions	1868mm x 99mm x 82mm
MacAdam Step	<5
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

### Photometric Data

