

# Modular



TP(a) Fire Rating



Aluminium Housing




Tri-Colour (3000K/4000K/6000K)




Opal Diffuser

## Dimensions

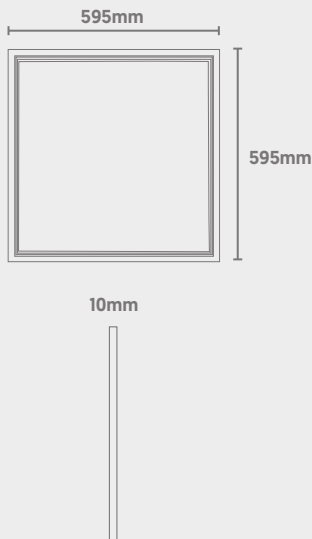

Light Source Energy Rating

## Photometric Data

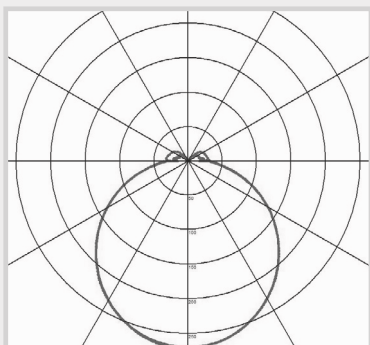

# QFrame


## Tri-Colour Edge-Lit Frame

QVIS<sup>®</sup>  
LED LIGHTING

CODE: QFRAME-40-6X6TC



Shown as installed

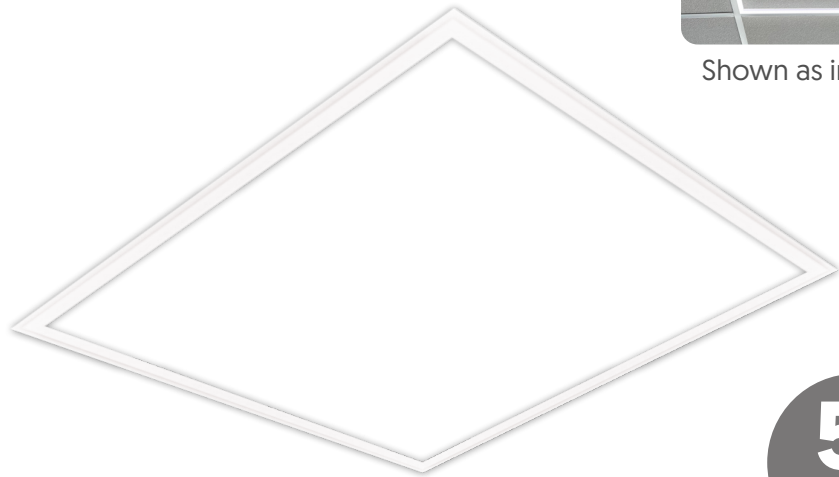

Power	Efficacy	Output	Kelvin
40W	105Lm/cW	4200Lm	Tri-Colour: 3000K, 4000K or 6000K

## Technical

Input Voltage	AC 220-240V
Colour Rendering Index	>80
Beam Spread	120°
Diffuser Type	Opal
Power Factor	>0.9
Typical UGR	<19
Operating Temp.	-20 to +50°C
Materials	Aluminium & Polycarbonate
IP Rating	IP20
Fire Rating	TP(a)
Dimmable	On Request
Dimensions	595mm x 595mm x 10mm
Weight	0.495kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS