








## Surface & Suspended

-  Low Glare Diffuser
-  BESA Mounting Points
-  Wattage Switchable
-  Conduit Side Entry

### Dimensions

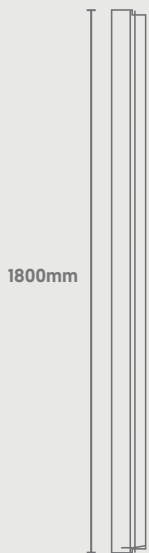

### Photometric Data

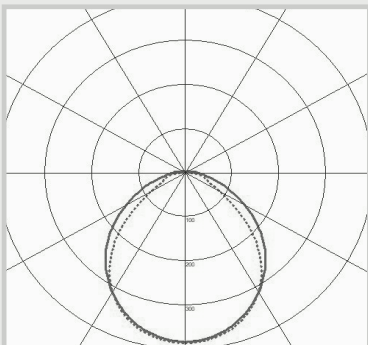

# Proteus Gen 2

## Prismatic Linear

CODE: P2-WS-1800NW

**QVIS**<sup>®</sup>  
LED LIGHTING



**7** YEARS  
WARRANTY  
+ 2 YEAR ON SITE\*

Power (Selectable)	Efficacy	Output	Kelvin
20W [Emergency 3W]	160Lm/cW	3200Lm [Emergency 480lm]	4000K
28W [Emergency 3W]	160Lm/cW	4480Lm [Emergency 480lm]	
36W [Emergency 3W]	160Lm/cW	5760Lm [Emergency 480lm]	
44W [Emergency 3W]	160Lm/cW	7040Lm [Emergency 480lm]	
52W [Emergency 3W]	160Lm/cW	8320Lm [Emergency 480lm]	
60W [Emergency 3W]	160Lm/cW	9600Lm [Emergency 480lm]	

### Technical

Input Voltage	AC 220-240V
Diffuser Type	Microprismatic
Colour Rendering Index	>85
Power Factor	0.9821
Operating Temp.	-20 to +65°C
Materials	Steel & Polycarbonate
IP Rating	IP40
Dimmable	On Request
Dimensions	1800mm x 205mm x 68mm
Weight	4.8kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS