


External


- IP65 Ingress Protection
- Conduit Side & Back Entry
- Wattage Switchable
- Tri-Colour (3000K/4000K/6000K)

Dimensions

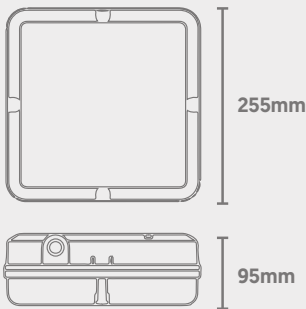

Light Source Energy Rating

Photometric Data

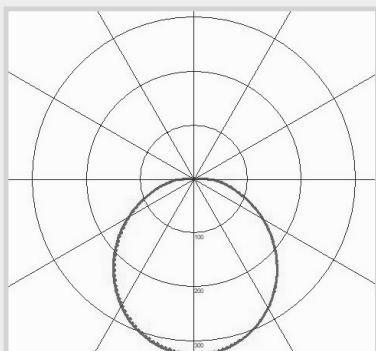

Rebel

Canopy Bulkhead

CODE: RBL-SWS-255TC/EM



3HR
EMERGENCY
DURATION

5
YEARS
WARRANTY*

| Power (Selectable) | Efficacy | Output | Kelvin |
|--------------------|----------|--------------------------|---|
| 8W [Emergency 3W] | 105Lm/cW | 840Lm [Emergency 315Lm] | Tri-Colour: 3000K, 4000K or 6000K |
| 12W [Emergency 3W] | 105Lm/cW | 1260Lm [Emergency 315Lm] | |
| 15W [Emergency 3W] | 105Lm/cW | 1575Lm [Emergency 315Lm] | |
| 18W [Emergency 3W] | 105Lm/cW | 1890Lm [Emergency 315Lm] | |

Technical

| | |
|------------------------|--|
| Input Voltage | AC 220-240V |
| Colour Rendering Index | >80 |
| Power Factor | >0.9 |
| Operating Temp. | -20 to +40°C |
| Materials | Polycarbonate |
| IP Rating | IP65 |
| IK Rating | IK10 |
| Dimmable | On Request |
| Dimensions | 255mm x 95mm |
| Weight | 1.01kg |
| MacAdam Step | <3 |
| Emergency Output | 3 Hours [3W] |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |