

Surface & Suspended



IP65 Ingress Protection



Screwless Design



Hinged Gear Tray




BESA Mounting Points

Dimensions




109mm

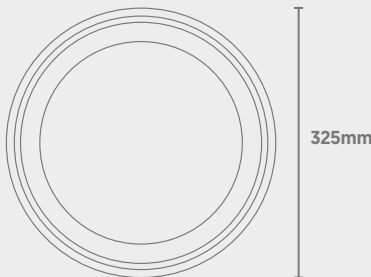

325mm

A T G F Light Source Energy Rating

Photometric Data

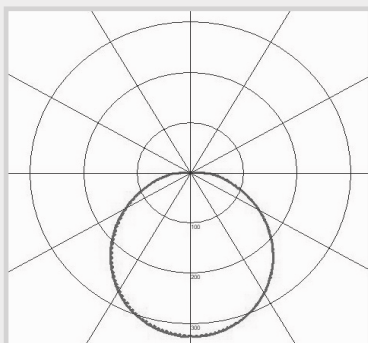

Taurus Gen 2

Tri-Colour Bulkhead

QVIS[®]
LED LIGHTING

CODE: TAU2-WS-325TC



5 YEARS WARRANTY*

Power (Selectable)	Efficacy	Output	Kelvin
8W	105Lm/cW	840Lm	Tri-Colour: 3000K, 4000K or 6000K
12W	105Lm/cW	1260Lm	
15W	105Lm/cW	1575Lm	
18W	105Lm/cW	1890Lm	

Technical

Input Voltage	AC 220-240V
Beam Spread	120°
Colour Rendering Index	>80
Power Factor	>0.8
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP65
IK Rating	IK10
Dimmable	On Request
Dimensions	325mm x 109mm
Weight	0.89kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS