

Surface & Suspended



IP20 Ingress Protection



IK106 Impact Resistance





Steel Housing




Conduit Side Entry

Dimensions

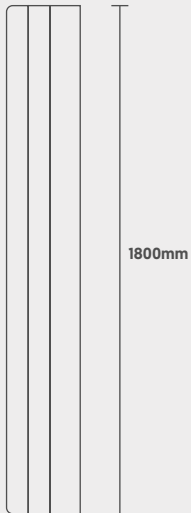

Photometric Data

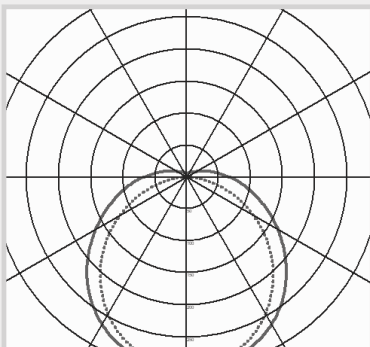

EduPac

Commercial Batten

CODE: EDUPAC-WS- 1800NW

QVIS[®]
LIGHTING & SECURITY



Power	Efficacy	Output	Kelvin
30W	120Lm/W	3600Lm	4000K
45W	120Lm/W	5400Lm	
60W	120Lm/W	7200Lm	

Technical

Input Voltage	AC 220-240V
Colour Rendering Index	>80
Beam Spread	120°
Power Factor	<0.90
Dimable	On Request
Operating Temp.	-20 to +45°C
Housing Materials	Steel
IP Rating	IP20
IK Rating	IK06
Weight	3.5kg
Dimensions	1800 x 170 x 79mm
MacAdam Step	<6
Lifetime	50,000 hours
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS
UGR	<19