


External




IP65 Ingress Protection



Conduit Back Entry




IK10 Impact Resistance



Tri-Colour (3000K/4000K/5000K)

Dimensions

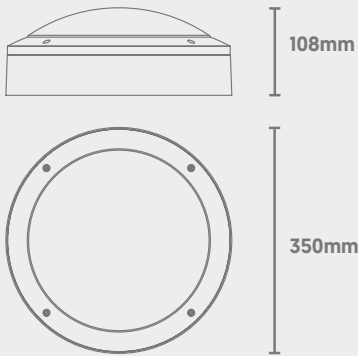

Eclipse

Tri-Colour Bulkhead



LIGHTING & SECURITY

CODE: EC-WS-TC/MS/EM




Power [Selectable]	Efficacy	Output	Kelvin
12W [Emergency ?W]	105Lm/cW	1260Lm [Emergency ??Lm]	Tri-Colour: 3000K, 4000K or 5000K
14W [Emergency ?W]	105Lm/cW	1470Lm [Emergency ??Lm]	
16W [Emergency ?W]	105Lm/cW	1680Lm [Emergency ??Lm]	
18W [Emergency ?W]	105Lm/cW	1890Lm [Emergency ??Lm]	
20W [Emergency ?W]	105Lm/cW	2100Lm [Emergency ??Lm]	
22W [Emergency ?W]	105Lm/cW	2310Lm [Emergency ??Lm]	

Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Power Factor	>0.95
Operating Temp.	-15 to +50°C
Materials	Die-Cast Aluminium & Polycarbonate
IP Rating	IP65
IK Rating	IK10
Dimmable	On Request
Dimensions	350mm x 108mm
Weight	2.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

Photometric Data

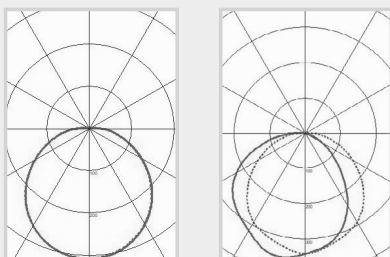

Full Moon

Half Moon