


External

Eclipse Tri-Colour Bulkhead

CODE: EC-WS-TC/MS

-  IP65 Ingress Protection
-  Conduit Back Entry
-  IK10 Impact Resistance
-  Tri-Colour (3000K/4000K/5000K)

Dimensions

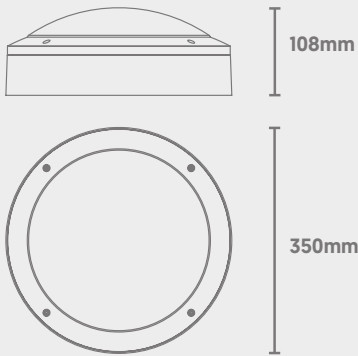


Power (Selectable)	Efficacy	Output	Kelvin
12W	105Lm/cW	1260Lm	Tri-Colour: 3000K, 4000K or 5000K
14W	105Lm/cW	1470Lm	
16W	105Lm/cW	1680Lm	
18W	105Lm/cW	1890Lm	
20W	105Lm/cW	2100Lm	
22W	105Lm/cW	2310Lm	

Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Power Factor	>0.95
Operating Temp.	-15 to +50°C
Materials	Die-Cast Aluminium & Polycarbonate
IP Rating	IP65
IK Rating	IK10
Dimmable	On Request
Dimensions	350mm x 108mm
Weight	2.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

Photometric Data

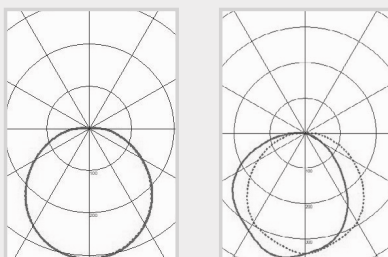

Full Moon

Half Moon