

## QStorm Pro


### Switchable Vapour Proof

CODE: QS-PRO-WS-1200TC/D



-  **High LED Efficacy**
-  **IK08 Impact Resistance**
-  **Wattage Switchable**
-  **Tri-Colour (3000K/4000K/5700K)**

#### Dimensions

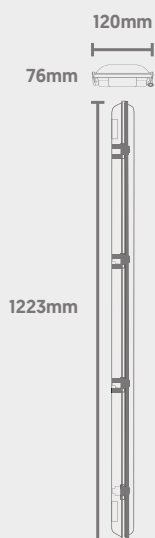

Power [Selectable]	Efficacy	Output	Kelvin
17W	170Lm/cW	2890Lm	<b>Tri-Colour:</b> 3000K, 4000K or 5700K
21W	170Lm/cW	3570Lm	
26W	170Lm/cW	4420Lm	
30W	170Lm/cW	5100Lm	

#### Technical

<b>Input Voltage</b>	AC 200-240V
<b>Colour Rendering Index</b>	>80
<b>Beam Spread</b>	120°
<b>Power Factor</b>	>0.9
<b>Operating Temp.</b>	-20 to +40°C
<b>Materials</b>	Polycarbonate
<b>IP Rating</b>	IP66
<b>IK Rating</b>	IK08
<b>Dimmable</b>	DALI
<b>Dimensions</b>	1223mm x 120mm x 76mm
<b>Weight</b>	1.97kg
<b>MacAdam Step</b>	<3
<b>Lifetime</b>	50,000 hours, L90-B10 (Ta 25 °C)
<b>CE Standards</b>	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
<b>CE Directives</b>	LVD, EMC, ERP & RoHS

#### Light Source Energy Rating



#### Photometric Data

