


## QStorm Pro

### Switchable Vapour Proof

CODE: QS-PRO-WS-1500TC/D

- High LED Efficacy
- IK08 Impact Resistance
- Wattage Switchable
- Tri-Colour (3000K/4000K/5700K)

#### Dimensions

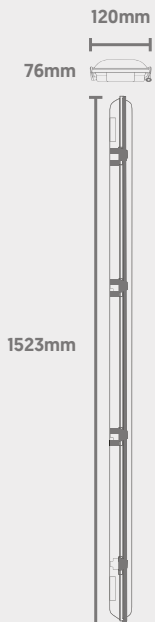

Power [Selectable]	Efficacy	Output	Kelvin
26W	170Lm/cW	4420Lm	<b>Tri-Colour:</b> 3000K, 4000K or 5700K
32W	170Lm/cW	5440Lm	
39W	170Lm/cW	6630Lm	
45W	170Lm/cW	7650Lm	

#### Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Beam Spread	120°
Power Factor	>0.9
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP66
IK Rating	IK08
Dimmable	DALI
Dimensions	1523mm x 120mm x 76mm
Weight	2.33kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

**A T G C** Light Source Energy Rating

#### Photometric Data

