


## QStorm Pro

### Switchable Vapour Proof

CODE: QS-PRO-WS-1800TC/EM


- High LED Efficacy
- IK08 Impact Resistance
- Wattage Switchable
- Tri-Colour (3000K/4000K/5700K)

#### Dimensions

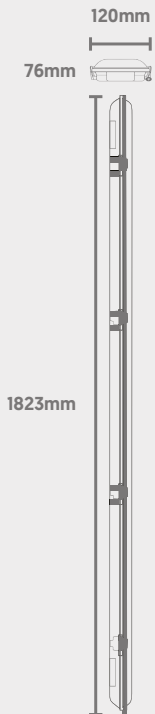

**A T G C** Light Source Energy Rating

#### Photometric Data

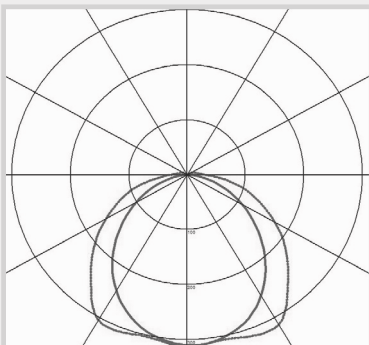

**3HR**  
EMERGENCY  
DURATION

**7**  
YEARS  
WARRANTY  
+ 2 YEAR ON SITE\*

Power [Selectable]	Efficacy	Output	Kelvin
35W [Emergency 3W]	170Lm/cW	5950Lm [Emergency 510Lm]	Tri-Colour: 3000K, 4000K or 5700K
44W [Emergency 3W]	170Lm/cW	7480Lm [Emergency 510Lm]	
53W [Emergency 3W]	170Lm/cW	9010Lm [Emergency 510Lm]	
62W [Emergency 3W]	170Lm/cW	10540Lm [Emergency 510Lm]	

#### Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Beam Spread	120°
Power Factor	>0.9
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP66
IK Rating	IK08
Dimmable	On Request
Dimensions	1823mm x 120mm x 76mm
Weight	2.84kg
MacAdam Step	<3
Lifetime	3 Hours [3W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS