

Modular



IP44 Ingress Protection



TP(a) Fire Rating




Aluminium Housing




Tri-Colour (3000K/4000K/6000K)

Dimensions

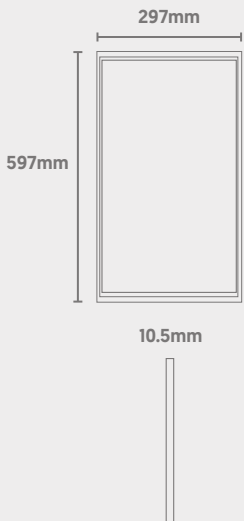

Light Source Energy Rating

Photometric Data

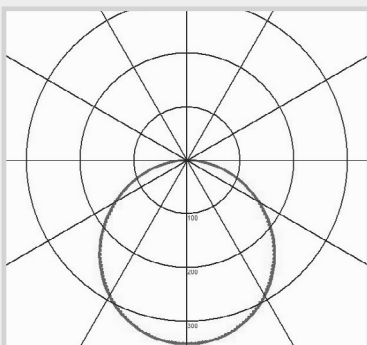

Orion

Tri-Colour Edge-Lit Panel

QVIS[®]

LIGHTING & SECURITY

CODE: ORN-20-6X3TC



Panel dimensions suit a range of ceiling types

Power	Efficacy	Output	Kelvin
20W	130Lm/cW	2600Lm	Tri-Colour: 3000K, 4000K or 6000K

Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>85
Beam Spread	160°
Diffuser Type	Opal
Power Factor	>0.95
Typical UGR	<19
Operating Temp.	-20 to +50°C
Materials	Aluminium
IP Rating	IP44
Fire Rating	TP(b)
Dimmable	On Request
Dimensions	597mm x 297mm x 10.5mm
Weight	4.1kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS