

Downlight



IP44 Ingress Protection



Adjustable Cut-Outs




Wattage Switchable




Tri-Colour (3000K/4000K/6000K)

Dimensions

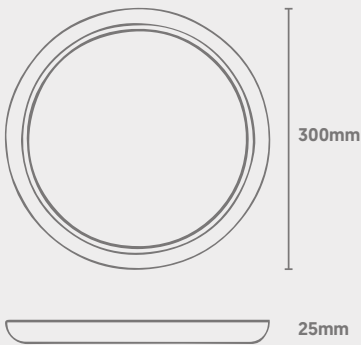

Photometric Data

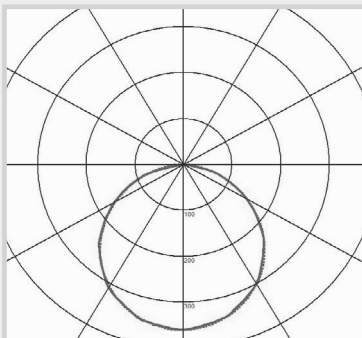

Virgo Pro

Multi-Fit Downlight

QVIS[®]

LIGHTING & SECURITY

CODE: VGO-PRO-WS-150/270TC



Power [Selectable]	Efficacy	Output	Kelvin
15W	110Lm/cW	1540Lm	Tri-Colour: 3000K, 4000K or 5000K
20W	110Lm/cW	2200Lm	
25W	110Lm/cW	2750Lm	

Technical

Input Voltage	AC 200-240V
Beam Spread	110°
Power Factor	>0.85
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP44
Fire Rating	TP[a]
Dimmable	On request
Adjustable Cut Out	150 to 270mm
Dimensions	300mm x 25mm
Weight	0.95Kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS