


Surface & Suspended

-  Dual-Colour (3000K/4000K)
-  Polycarbonate Lens
-  Aluminium Housing
-  Wattage Switchable

Dimensions

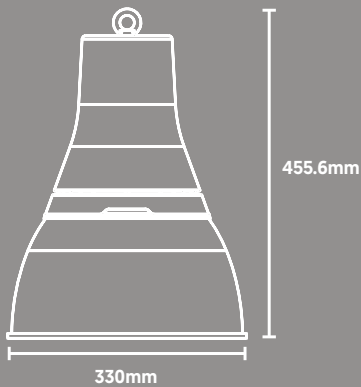


GlowDec

Pendant High Bay

CODE: GD-PRO-WS-CCT/EM

QVIS[®]
LIGHTING & SECURITY

DECORATIVE RANGE

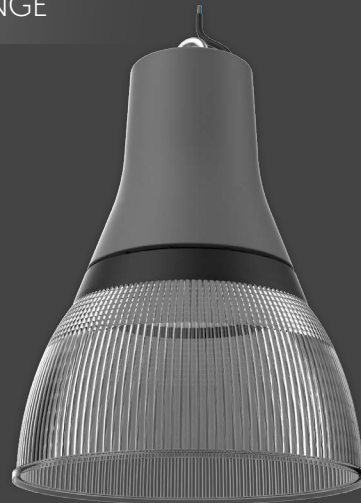

Power [Selectable]	Efficacy	Output	Kelvin
25W [Emergency 3W]	140Lm/cW	3500Lm [Emergency 420Lm]	Dual-Colour: 3000K or 4000K
40W [Emergency 3W]	140Lm/cW	5600Lm [Emergency 420Lm]	
60W [Emergency 3W]	140Lm/cW	8400Lm [Emergency 420Lm]	
80W [Emergency 3W]	140Lm/cW	11200Lm [Emergency 420Lm]	

Technical

Input Voltage	AC 120-277V
Colour Rendering Index	>80
Beam Spread	90°
Power Factor	>0.95
Operating Temp.	-30 to +45°C
Materials	Aluminium & Polycarbonate
IP Rating	IP20
IK Rating	IK06
Suspension & Cable	3m AC Cable/Suspension
Dimmable	On Request
Dimensions	455.6mm x 330mm
Weight	2kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

Photometric Data

