



NCF VAPOUR PROOF

NCF2-35-1200NW

QVIS[®]
LIGHTING & SECURITY




TRIDONIC
enlightening your ideas
Driver as Standard

EPISTAR
LED's inside

Specification	NCF2 1200
System Power	35W
LED Chipset	Epistar
Driver Manufacturer	Tridonic
Colour Rendering Index	>85
Lumen Output	4200Lm
LED Efficacy	120 Lm/cW
Dimmable	Contact Office
Power Factor	0.958
IP Rating	IP65
Beam Spread	120 °
Colour Temperature	4000K
Housing Material	Polycarbonate
Diffuser Type	Polycarbonate
Input Voltage	AC200-240V, 47-63Hz
Operating Temperature	-20 to 55 °C
Dimensions	1260mm x 110mm x 73mm
MacAdam Step	2.8
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

TECHNICAL DRAWINGS

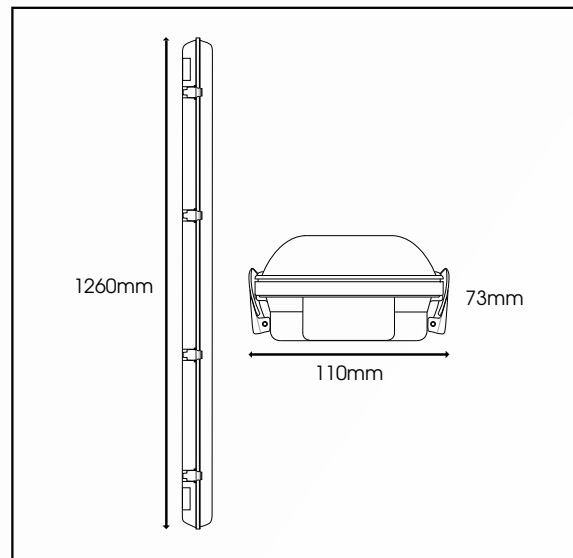

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

