


POESWITCH-8

8 PoE PORT WITH 1 UP LINK PORT | SMART POE SWITCH

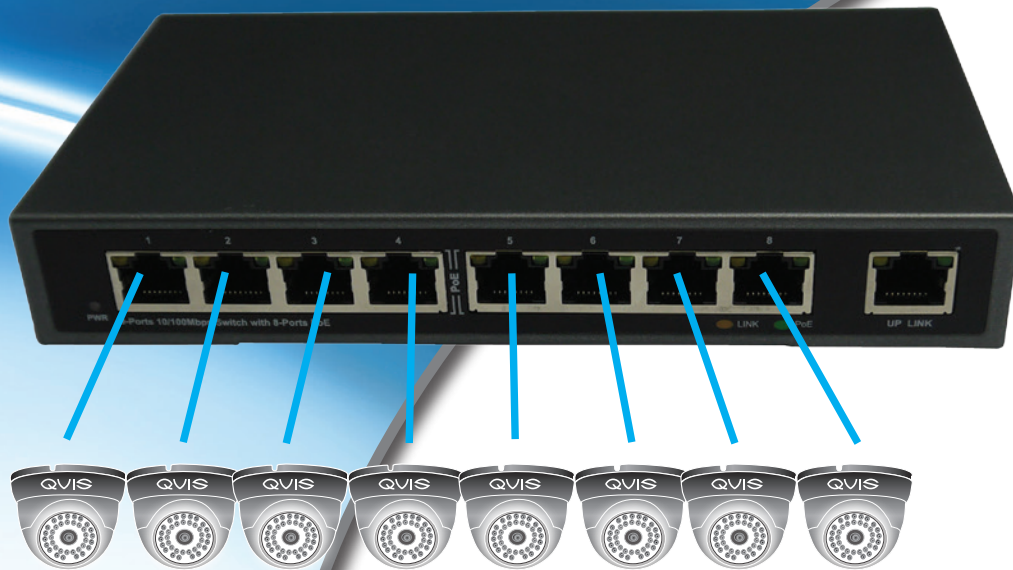

POESWITCH-8 SPECIFICATIONS

STANDARD	IEEE802.3af
PoE Ports	8 PoE ports
Up Link Ports	1 up link support
LED	Power (red) / PoE in Use (orange) / 10/100 LINK/ACT (green)
Power Requirement	100-240V AC, 50/60Hz
Adapter Power Requirement	Input: 100-240V AC 50/60Hz, 2.5A Output: 48V, 2.5A
Power Consumption/Dissipation	120 Watts Max
PoE Power Output	Per port 48V DC, 320ma max 15.4 Watts
PoE Power Supply Type	1/2(+), 3/6(-), Mode-A, End-Span
PoE Power Budget	PoE Max 110w
Regulation Compliance	FCC Part 15 Class A, CE
Standard Compliance	IEEE 802.3 : 10 Base-T IEEE 802.3U: 100Base-TX IEEE 802.3x: Flow Control IEEE 802.3ad: Port trunk with LACP IEEE 802.1D: Spanning tree protocol IEEE 802.1W: Rapid spanning tree protocol IEEE 802.1P: Class of service IEEE 802.1Q: VLAN Tagging IEEE 802.1x: Port Authentication Network Control IEEE 802.3af: Power over Ethernet
Operating	Temperature: 0°C~50°C Relative Humidity: 20~95%
Storage	Temperature: -10°C~70°C Relative Humidity: 20~95% (non-condensing)
Dimension	185x103x28mm

GENERAL FEATURES

- IEEE 802.3: 10 BASE-T
- IEEE 802.3u: 100BASE-TX
- IEEE802.3af: Power over Ethernet
- IEEE802.3x: Flow control



For further information on our products visit our website www.adata.co.uk, email: sales@adata.co.uk Sales Line: (023 92 488300).