

Ebox Surface Exit Box

Emergency Range


CODE: EBOX-3

QVIS[®]
LED LIGHTING



Specification	Ebox
System Power	4W
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>85
Discharge Duration	3 Hours
Light Windows	2x Down-Facing Windows (For Illumination of Area Below)
Viewing Distance	35m
IP Rating	IP20
Legend	Up Arrow Supplied as Standard
Lamp Protection	Overcharge and Discharge Protection
LED Indicator	Green Charge Indicator
Battery Specifications	3.6V 1500mAh Ni-CD Battery
Colour Temperature	6000K
Housing Material	White Painted Steel & Polycarbonate Plastic Legend
Input Voltage	AC200-240V
Dimensions	290mm x 190mm x 60mm
Weight	1.2kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-22, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3- 3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

TECHNICAL DRAWINGS

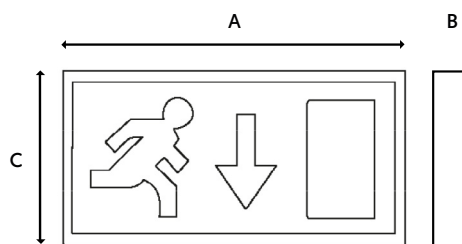

A = 290mm C = 190mm
B = 60mm

* Warranty terms and conditions apply

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com